

Conval INC.

High Performance Valves for the World's Most Demanding Applications

- *High Pressure*
- *High Temperature*
- *Ball*
- *Bellows*
- *Check*
- *Gate*
- *Globe*
- *Throttling*
- *Urea Service*



WELCOME TO **Conval**^{Inc.}

Conval has designed and manufactured high-pressure, high-temperature forged steel valves for the world's most demanding applications for over 50 years. One of Conval's guiding principles is selecting, cultivating, and serving the needs of our markets with innovative and technologically-advanced products. In order to achieve this high degree of excellence, we have set up a Quality System that ensures compliance to requirements. Conval was ISO 9001 Certified on Sept. 11, 1992. We also comply to Appendix B of 10 CFR 50, the Crosby Quality program, N-stamp certifications, the European PED, IBR and many other standards.

Conval valves and accessories are in service with customers around the world. That's why Conval has stocking representatives on every continent. For your convenience, there is a complete, up-to-date list of representatives and regional managers on our website, Conval.com. We look forward to being of service to you soon.



TABLE OF CONTENTS

Why CLAMPSEAL® Valves are Top Performers in Their Class	3
A Wide Conval Product Line.....	4
Exploded View of CLAMPSEAL® Valve.....	5
The Most Advanced Forged Steel Valve Available	6
Conval Packing System	7
Y-Globe Stop, Check and Stop Check Valves	8 & 9
T-Pattern Stop, Check and Stop Check Valves.....	10 & 11
Angle Stop, Check and Stop Check Valves.....	12 & 13
Throttling Valve	14 & 15
CAMSEAL Ball Valves	16 & 17
CLAMPSEAL Swivldisc Gate Valve.....	18-20
Strainers	21
Whisperjets.....	22
Bellows Seal Valve.....	23-26
Special Application Valves, Custom End Connections...	27-32
Actuated Valves.....	33
Service Tool Cross Reference.....	34
Conval Tool Kit.....	35
Standard Parts & Material List	36
Figure Number Description.....	37
Pressure/Temperature Charts	38-45
ASME Class and Ratings.....	46
Applications.....	47

Why CLAMPSEAL® Valves are Top Performers in Their Class



Intelligent Patented Design

The basic design of the Clampseal Globe Valve has not changed since it was invented over 50 years ago. The axial design ensures tight concentricity, which eliminates side loading of the packing and minimizes wear forces on trim components. The high-performance packing system ensures a tight seal between packing material and sealing surfaces, and features a unique packing gland incorporating a 360-degree, consistent load on the packing rings, virtually eliminating packing leaks. The Integral Gland Wrench makes packing adjustments simple, with no tools required. The bonnet's pressure-activated seal provides leak-tight integrity, while allowing rapid access to valve trim for inspection and maintenance. The pressure-actuated backseat makes for a positive internal stop while extending packing life. All other valve benefits begin with this outstanding and innovative design.

Enormous Versatility

Clampseal Globe Valves can be supplied in over 12,000 configurations, in 1/2" to 4" sizes with three body styles, in pressure classes to 4500# including a wide variety of ends and materials, and for applications as extreme as cryogenic to fire-safe. Parts may be easily interchanged across installations. The result? An entire plant can be supported with a small parts inventory, which reduces stocking costs, procurement expenses and plant maintenance training time.

Excellence in Quality and Manufacturing

Clampseal Globe Valves are made to exacting specifications in our Advanced Manufacturing Center in Enfield, Connecticut USA. Our valves are backed by a two-year warranty and a global customer service team consisting of top-notch factory and field engineering personnel.

Component and finish quality are exceptional, with traceability of all wetted parts and the yoke. Certifications can vary by application, but include ISO 9001, EU/PED, Canadian, N/NPT and others. The result? Peace of mind and reduced risk that come from reliable performance over many years.

Proven Performance

Clampseal Globe Valves have proven to be top performers in thousands of real-life, long-term severe service applications around the world. They handle the job well with little attention, saving significant time and money in downtime, inspection, repair and replacement.

Rapid In-line Serviceability

No other severe service globe valve offers the exceptional in-line serviceability provided by our patented, modular Clampseal Globe Valves. The result? Enormous savings in downtime and maintenance labor, plus reduced man-REM exposure in nuclear environments.

Total Life Cycle Value

Most OEM valves fail to provide long-term performance in highly demanding applications, because they are selected to reduce first cost without proper consideration for long-term consequences. In our 50+ years of experience with customers around the world, inferior valves typically only last 4-5 years or less. By contrast, where Clampseal Globe Valves are originally specified and installed, valve life is a whopping 5-10x longer. That's incredible ROI, which confirms that, from a total life cycle perspective, Clampseal Globe Valves are your smartest choice.

A Wide Conval Product Line

Standard Sizes

1/2" through 3" (4" reduced port)

Valves may also be supplied to metric dimensions.

Pressure Ratings(ASME)

Nominal: 900/1500/2500/4500

Intermediate: 1195/2155/3045

Blowdown / Letdown Valves

Five styles include single orifice continuous blowdown, unit tandem blowdown, Whisperjet blowdown, dual range valve for greater turndown and variable trim for fine control. Valves suitable for steam drains or any high pressure letdown service.

Gate Valves

Unique Swivdisc flex wedge gate for positive seat tightness. Anti-galling gate guiding, pressure seal bonnet, one piece gland with integral gland wrench.

Strainers

Simple and rugged with wide range of strainer element hole sizes. Socket blowoff connection or integral blowoff valve option available on all sizes.

Optional Valves

Adaptable to many on-line serviceable variations, including 3-way service, cryogenic service, bellows stem seal or leakoff features.

Standard Accessories

Actuators - electric, pneumatic or hydraulic

Locking Device - open, closed, or both

Limit Switch - single or dual

Stem Shroud


Position Indicator

Globe, Piston Check and Stop Check valves, Y, Angle and T pattern body styles all feature forged body and yoke; pressure seal bonnets with integral backseat and cartridge packing chambers; one piece packing gland with integral gland wrench; solid Stellite™ seat and disc/piston; and Electroless Nickel plate finish on Carbon Steel and Low Alloy valves.


End Prep		
Type	Standard	Special
Sockets Weld	1/2" - 2"	2 1/2"
Butt Weld	2 1/2" - 4"	1/2" - 2"
Threaded	1/2" - 1"	1 1/2" - 2"
Clamp	1/2" - 3"	4"
Flanges		All Sizes

Materials (Body and Yoke)		
Type	Standard	Special
Carbon Steel	SA 105 WCB (Gate Valve)	A350-LF2
Low Alloy	S182-F22 WC9 (Gate Valve) SA182-F91 C12A (Gate Valve)	SA182-F5 SA182-F11
Stainless	SA182-F316 SA182-F316L CF8M (Gate Valve)	SA182-F347
Other		Monei™ 400 Inconel™ 600

Exploded View of CLAMPSEAL® Valve

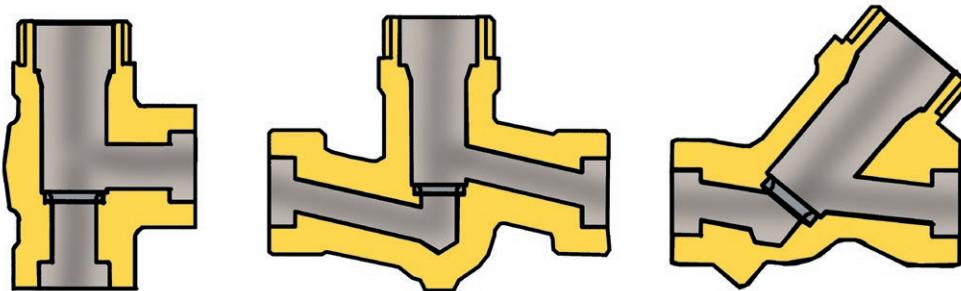

VALVES WITH SIZE CODE 8, 9 or 10
HAVE HANDWHEEL & ADAPTOR (IMPACT HANDWHEEL)

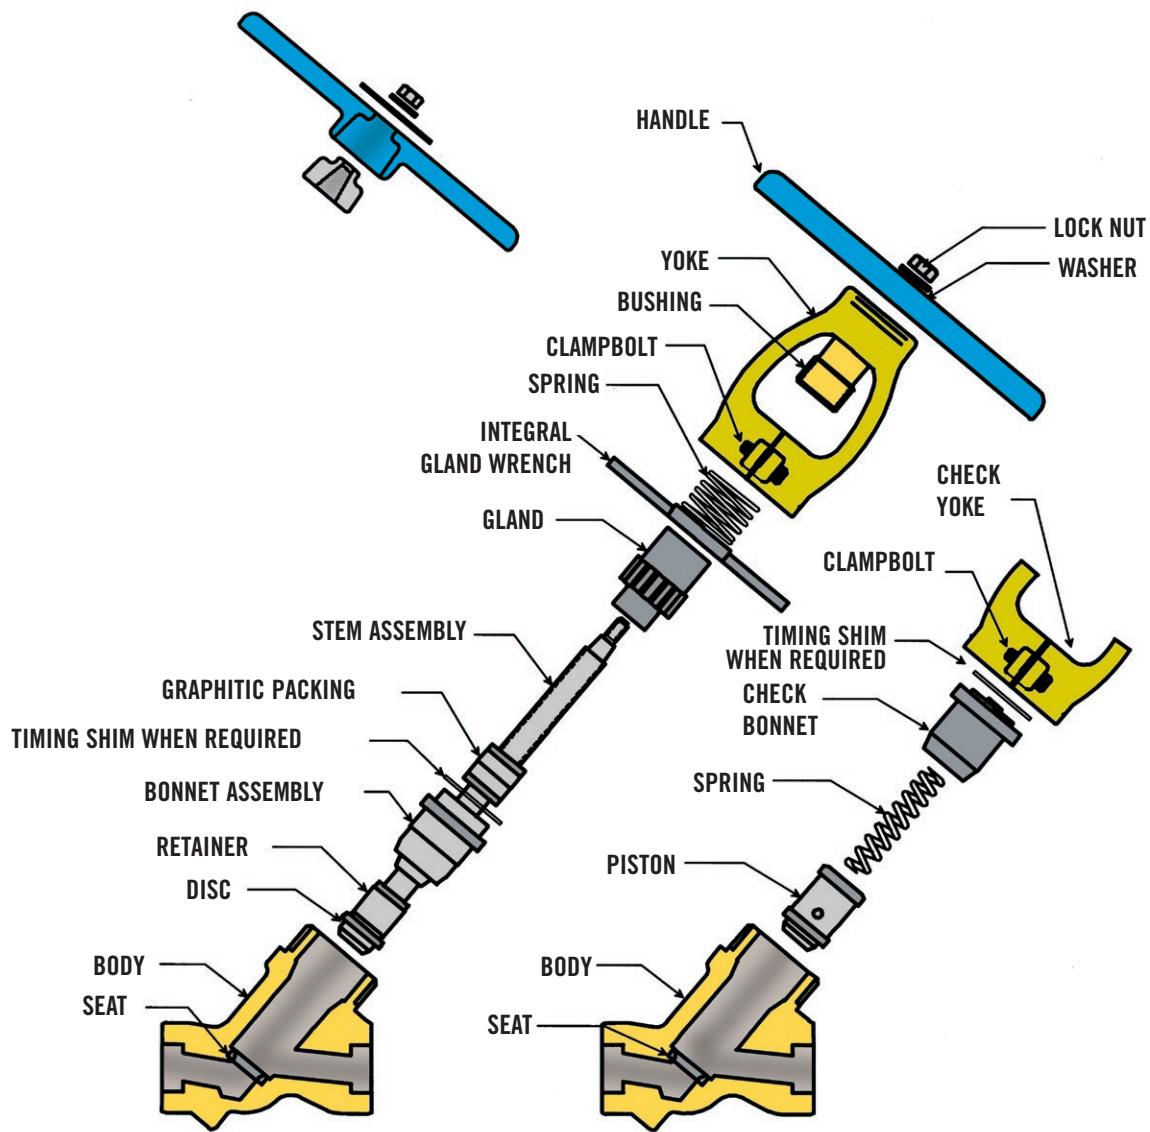

The Most Advanced Forged Steel Valve Available



Axial Design

The axial design of CLAMPSEAL® valves ensures tight concentricity. This feature is critical for superior valve performance. Concentricity eliminates side loading of the packing and minimizes wear forces on the trim components.

High Performance Packing System

The CLAMPSEAL® packing system incorporates corrosion-inhibited, high density graphitic packing. An optional LIVE LOADED GLAND system maintains packing loads for long periods without routine maintenance adjustments. Uniform loading from the axial one-piece gland and the highly polished stainless steel stem and stuffing box ensure a tight seal between packing material and sealing surfaces.

Integral Gland Wrench – I.G.W.

The Integral Gland Wrench makes packing adjustments simple, no tools required.

Clampseal® Bonnet/Chamber

A secure, leak proof bonnet allows rapid access to valve trim for inspection and maintenance. The pressure boundary is sealed at the smallest diameter possible to ensure maximum strength, low stress and minimum weight.

Pressure Actuated Backseat

The pressure actuated backseat provides maximum valve integrity by ensuring a positive internal stop for the valve stem and disc assembly while extending packing life by securely isolating the packing from line pressure when the valve is fully open.

Modular Body Styles

Three interchangeable body styles, Y, ANGLE and T-PATTERN use identical replacement trim parts to lessen your tool and inventory costs. Solid cobalt alloy seats provide high erosion resistance and repeatable in-line resurfacing (Cobalt free alloys are also available).

Rapid In-line Serviceability

No other severe service globe valve offers the exceptional in-line serviceability provided by our patented, modular Clampseal Globe Valves. The result? Enormous savings in downtime and maintenance labor, plus reduced man-REM exposure in nuclear environments.

Conval Packing System

The CLAMPSEAL® packing system utilizes proven, corrosion-inhibited, graphite packing. The packing is uniformly loaded with a one-piece gland. The stuffing box and stem are burnished stainless steel to ensure a tight seal between the system fluids and sealing surfaces.

The packing seal in any valve is inherently vulnerable. Normal packing shrinkage, frictional and pressure forces, and improper or neglected adjustment all contribute to packing deterioration. In an effort to maximize packing life, several innovative features have been incorporated in the CLAMPSEAL® design.

- **Single Piece Gland** insures uniform packing compression and eliminates the potential for stem damage from gland cocking.

- **Surface Finishes and Close Tolerances** of stem and chamber provide optimal sealing surfaces and minimize wear.


- **Narrow Packing Rings** reduce the effect of packing shrinkage, thereby reducing the frequency of packing gland adjustment. Since force = pressure x area ($F = P \times A$), by keeping the packing area to a minimum, there is less force being exerted by the system fluid, making it easier to contain.

- **Integral Gland Wrench**, standard on all CLAMPSEAL® globe and gate valves, provides immediate gland/packing adjustment capability.


- **Pressure Seal Backseat** increases packing life and provides maximum valve integrity by ensuring a positive internal stop for the valve stem and disc assembly, securely isolating packing from line pressure when valve is fully open.

- **Cartridge Type Packing Chamber** with secure, leak-proof bonnet allows rapid access to valve trim for inspection and maintenance. Pressure boundary is sealed at the smallest diameter possible to ensure maximum strength and low stress.


- **Thermal Isolation** of the packing chamber increases packing life. The Stainless Steel packing chamber is a separate unit from the body and therefore, eliminates the need to remove or change packing after stress relieving.

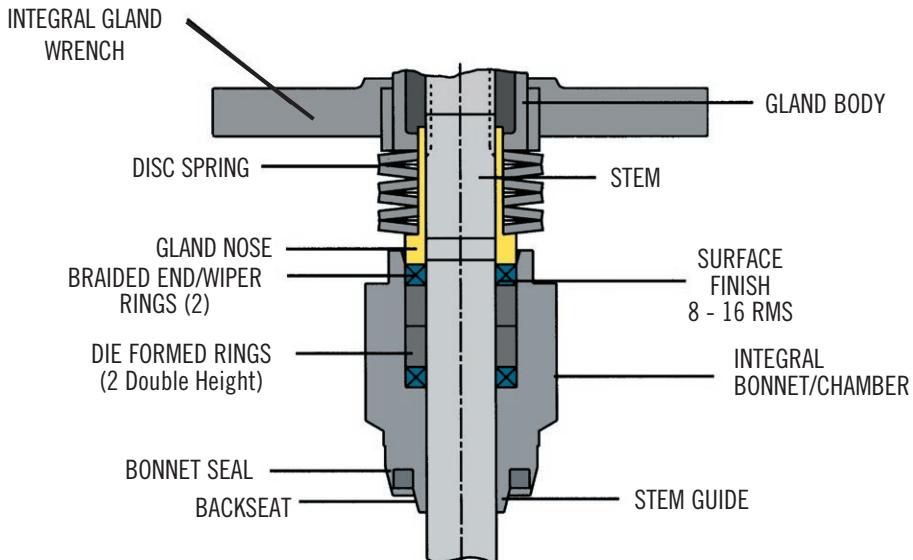

Optional Live Loaded Gland feature shown with the CLAMPSEAL® valve.

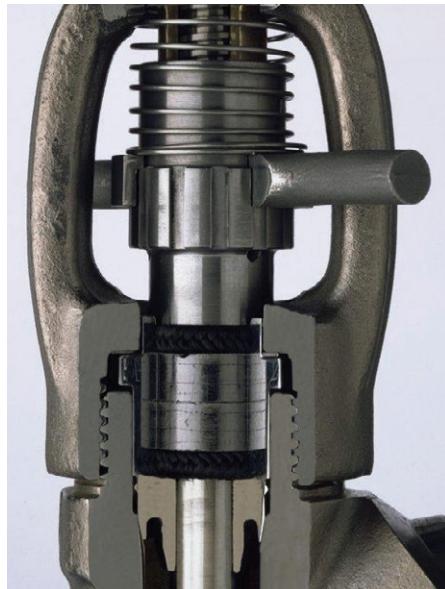


NOTE: TO ENSURE PROPER PACKING INTEGRITY, REFER TO CONVAL SERVICING INSTRUCTIONS FOR APPROPRIATE GLAND TORQUES BEFORE INSTALLING A REPAIRED VALVE IN-LINE.



See product brochure for more details.

Y-Globe Stop, Check and Stop Check Valves

Y-pattern globe valves provide the maximum Cv possible in a globe valve. All Y-pattern valves are rodable. Available in 1/2" to 4"; ASME pressure classes through 4500; A105, F22, F91, F316, F347, Inconel™, Monel™ and other materials.

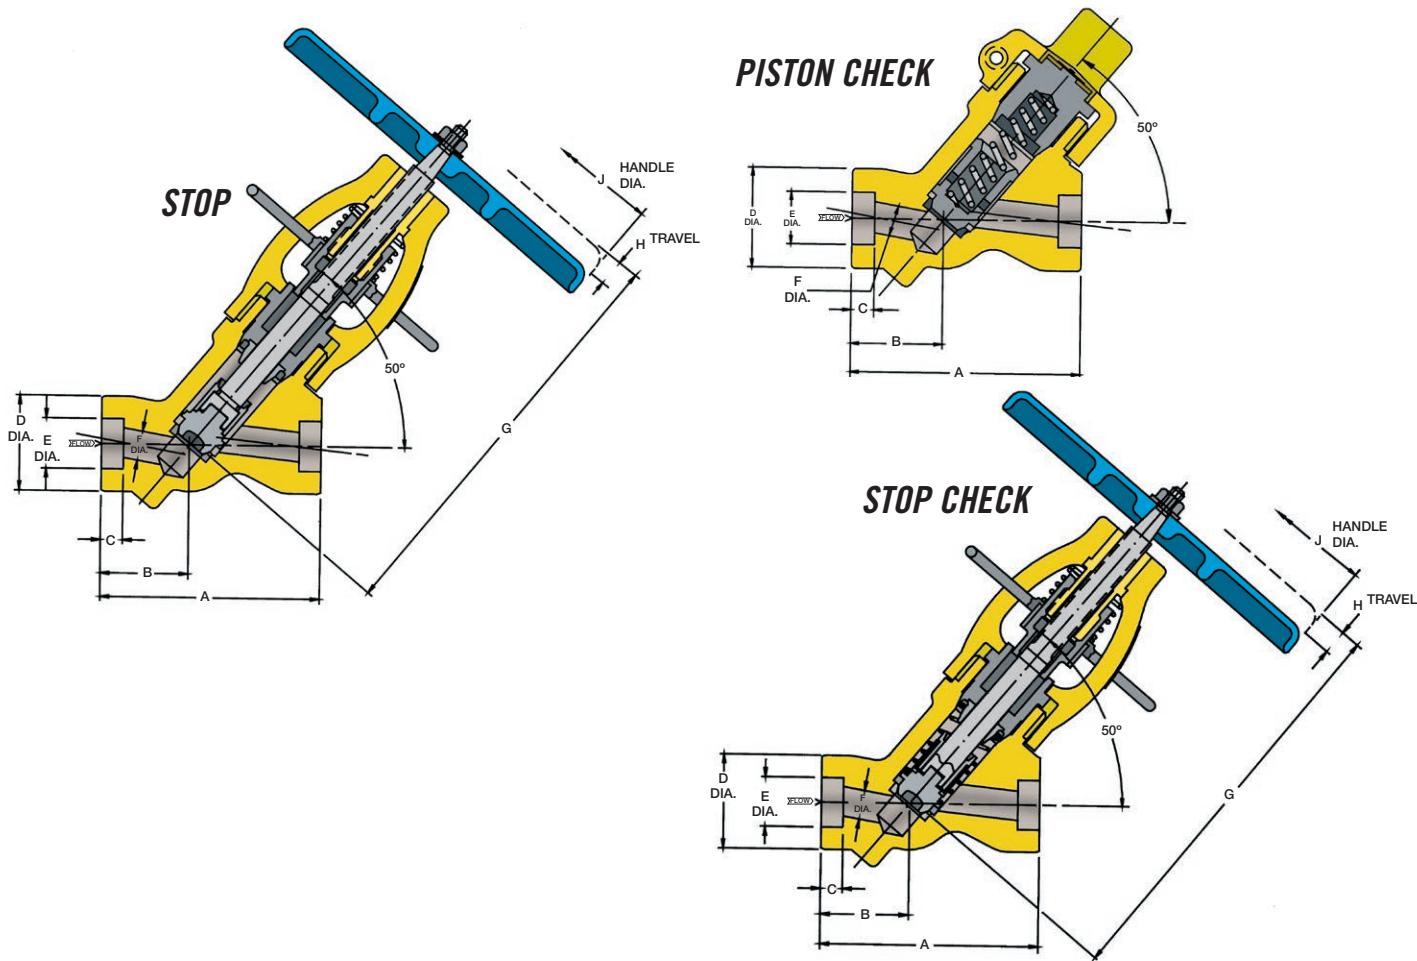

Y-Globe Stop, Check and Stop Check Valves

PRESSURE CLASS	Size Code	Pipe Size	A		B		C*	D	E*	F	G	H	J	Stop Cv/Kv	Check Cv/Kv	Check & Stop Cv/Kv	Stop & Stop Chk Wgt	Check Wgt
			SW	BW	SW	BW												
NOMINAL	3D	1/2 15	3 3/4 95	3 3/4 95	1 1/2 38	1 1/2 38	3/8 10	1 5/8 41	0.860 21.8	1/2 13	7 3/8 190	9/16 14	6 1/2 165	6 5	5 4	5 2	4 2	
	5E	3/4 20	4 1/2 114	4 3/4 121	1 3/4 44	1 3/4 44	1/2 13	2 5/16 59	1.070 27.2	5/8 16	8 13/16 224	11/16 17	8 203	9 8	8 7	11 5	8 4	
	5F	1 25	4 1/2 114	4 3/4 121	1 3/4 44	1 3/4 44	1/2 13	2 5/16 59	1.335 33.9	13/16 21	8 15/16 227	3/4 19	8 203	15 13	13 11	10 5	8 4	
	5G	1 1/4 32	4 1/2 114	4 3/4 121	1 3/4 44	1 3/4 44	1/2 13	2 5/16 59	1.680 42.7	1 25	9 7/16 240	1 1/4 32	24 203	21 21	21 18	9 4	6 3	
INTER-MEDIUM	6H	1 1/2 40	5 1/2 140	6 1/8 156	2 1/8 54	2 7/16 62	1/2 13	2 11/16 68	1.920 48.8	1 1/4 32	9 13/16 249	1 3/16 30	8 203	36 31	31 27	14 6	11 5	
	7J	2 50	6 1/4 158	6 1/2 165	2 9/16 65	2 9/16 65	5/8 16	3 1/4 83	2.411 61.2	1 1/2 38	12 7/8 327	1 1/4 32	61 305	53 53	53 46	21 10	21 10	
	8K	2 1/2 65	7 1/4 184	7 1/4 184	2 11/16 68	2 11/16 68	5/8 16	3 15/16 100	2.914 74.0	1 7/8 48	14 11/16 373	1 3/4 44	86 44	75 305	43 74	43 65	26 20	
	9L	3 80	- -	9 5/8 244	- -	3 5/8 92	- -	4 3/8 111	- -	2 1/4 57	16 13/16 427	2 7/32 56	122 356	106 106	106 92	71 32	37 17	
1195	10M	4 100	- -	12 305	- -	5 5/16 135	- -	4 7/8 124	- -	2 5/8 67	19 1/16 484	2 1/2 64	170 457	157 147	110 136	77 50	77 35	

* Socket Weld dimensions shown; Consult factory for Butt Weld dimensions.


Numbers shown in Black indicate dimensions in inches, weight in pounds. Numbers shown in blue indicate dimensions in mm, weights in kilograms.

Threaded end valves are nominal ASME B16.34 rated. Consult factory for other ratings.

NOTE: All weights are approximate for shipping purposes only. Information on Figure Number Variations can be found on page 33.

T-Pattern Stop Valves, also available in Check and Stop Check Valves

T-pattern, vertical stem globe valves provide easily accessible stems and extinctions for remote manual operation. Available in 1/2" to 3"; ASME pressure classes through 4500; A105, F22, F91, F316, F347, Inconel™, Monel™ and other materials.

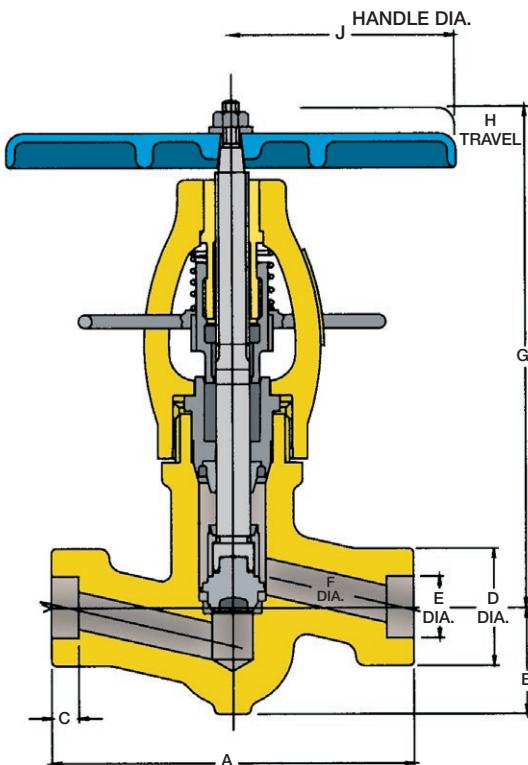

Pressure Class	Size Code	Pipe Size	A SW	B BW	C*	D	E*	F	G	H	J	Cv Kv	Wgt	
NOMINAL 900	3D	1/2 15	5 127	5 127	1 1/2 38	3/8 10	1 5/8 41	0.860 21.8	1/2 13	7 11/32 187	9/16 14	6 1/2 165	4 4	6 3
	5E	3/4 20	6 1/2 165	6 1/2 165	1 7/8 48	1/2 13	2 3/8 60	1.070 27.2	5/8 16	8 13/16 224	11/16 17	8 203	6 5	13 6
	5F	1 25	6 1/2 165	6 1/2 165	1 7/8 48	1/2 13	2 3/8 60	1.335 33.9	13/16 21	9 229	3/4 19	8 203	9 8	12 5
	7G	1 1/4 32	8 1/2 216	8 1/2 216	3 1/8 79	1/2 13	3 1/4 83	1.680 42.7	1 25	12 11/16 322	1 3/16 30	12 305	14 12	25 11
INTERMEDIATE 1195	7H	1 1/2 40	8 1/2 216	8 1/2 216	3 1/8 79	1/2 13	3 1/4 83	1.920 48.8	1 1/4 32	12 11/16 322	1 3/16 30	12 305	22 19	24 11
	8J	2 50	10 254	10 254	3 3/4 95	5/8 16	3 7/8 98	2.411 61.2	1 1/2 38	15 381	1 9/16 381	12 305	32 28	55 25
	8J	2 1/2 65	10 254	10 254	3 3/4 95	5/8 16	3 7/8 98	1.420 48.8	1 1/2 38	15 381	1 9/16 381	12 305	32 28	55 25
	8J	3 80	- -	10 254	3 3/4 95	- -	3 7/8 98	- -	1 1/2 38	15 381	1 9/16 381	12 305	32 28	55 25
NOMINAL 1500	3D	1/2 15	5 127	5 127	1 1/2 38	3/8 10	1 5/8 41	0.860 21.8	1/2 13	7 7/16 189	9/16 14	6 1/2 165	4 4	6 3
	5E	3/4 20	6 1/2 165	6 1/2 165	1 7/8 48	1/2 13	2 3/8 60	1.070 27.2	5/8 16	8 13/16 224	11/16 17	8 203	6 5	13 6
	5F	1 25	6 1/2 165	6 1/2 165	1 7/8 48	1/2 13	2 3/8 60	1.335 33.9	13/16 21	9 229	3/4 19	8 203	9 8	12 5
	7G	1 1/4 32	8 1/2 216	8 1/2 216	3 1/8 79	1/2 13	3 1/4 83	1.680 42.7	1 25	12 11/16 322	1 3/16 30	12 305	14 12	25 11
INTERMEDIATE 2155	7H	1 1/2 40	8 1/2 216	8 1/2 216	3 1/8 79	1/2 13	3 1/4 83	1.920 48.8	1 1/4 32	12 11/16 322	1 3/16 30	12 305	22 19	24 11
	8J	2 50	10 254	10 254	3 3/4 95	5/8 16	3 7/8 98	2.411 61.2	1 1/2 38	15 381	1 9/16 381	12 305	32 28	55 25
	8J	2 1/2 65	- -	10 254	3 3/4 95	- -	3 7/8 98	- -	1 1/2 38	15 381	1 9/16 381	12 305	32 28	55 25
	8J	3 80	- -	10 254	3 3/4 95	- -	3 7/8 98	- -	1 1/2 38	15 381	1 9/16 381	12 305	32 28	55 25


* Socket Weld dimensions shown; Consult factory for Butt Weld dimensions.

Numbers shown in Black indicate dimensions in inches, weight in pounds. Numbers shown in blue indicate dimensions in mm, weights in kilograms.

Threaded end valves are nominal ASME B16.34 rated. Consult factory for other ratings.

NOTE: All weights are approximate for shipping purposes only. Information on Figure Number Variations can be found on page 33.

TYPICAL FLOW CHART

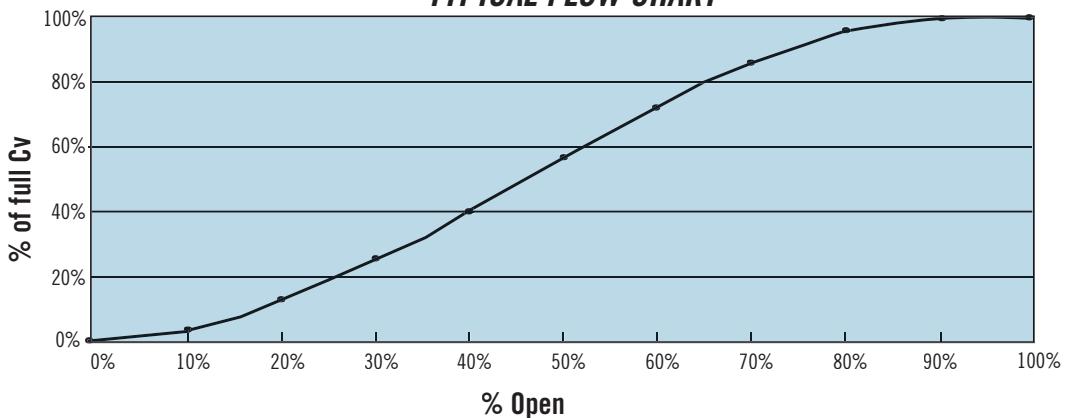


SPECIFICATIONS

Size Code	Pipe Size	Cv/Kv Standard Orifice Size																				
		1/8 3.2	3/16 4.8	1/4 6.4	5/16 7.9	3/8 9.5	7/16 11.1	1/2 12.7	9/16 14.3	5/8 15.9	11/16 17.5	3/4 19.1	13/16 20.6	7/8 22.2	15/16 23.8	1 25.4	1 1/16 27.0	1 1/8 28.6	1 3/16 30.2	1 1/4 31.6	1 3/8 34.9	1 1/2 38.1
5E	1/2 3/4 1	15 20 25	0.42 1.0 0.36	1.1 2.4 2.0																		
7G	1 1 1/4 1 1/2 2	25 32 40 50	0.5 0.4 1.0 1.8	1.1 2.1 3 3	5 4	7 6	9 8	11 10														
8H	1 1/4 1 1/2 2	32 40 50				5 4	6 5	8 7	10 9	13 11	15 13	18 16										
10K	2 2 1/2 3 4	50 65 80 100							13 11	16 14	19 16	22 19	25 22	28 24	31 27	35 30	38 33	42 36	46 40	49 42	59 51	64 55

Numbers shown in black indicate dimensions in inches/Cv. Numbers shown in blue indicate dimensions in mm/Kv.

NOTE: Other materials available upon request.



See product brochure for more details.

Camseal® Metal-Seated, Cartridge-Style, Top Entry, Zero Leakage Ball Valves save significant time and money on installation, maintenance, replacement and downtime.



DESIGN FEATURES

Conval Camseal Ball Valve Provides Zero Leakage

Zero Body Leakage: The body/bonnet bolting for the top entry design is not susceptible to pipeline stresses – precluding the potential for leakage.

Zero Seat Leakage: Conval's Camseal has been type-tested using high pressure Nitrogen gas, achieving zero bubbles in four minutes. The result is industry leading performance with every valve and the longest in-service life compared to competitive brands.

Zero Stem Seal Leakage: Conval's exclusive Integral Gland Wrench concentrically loads the stem packing without tools, eliminating stem leaks and extending packing life. Live loading is available as an option.

Cartridge-style Top Entry

With top entry access, maintenance and replacement of the cartridge internals are very convenient, with no effect on existing piping and welds.

Robust Stem-Ball Engagement

Reliable, accurate ball alignment is achieved due to the robust engagement between the one-piece stem and the ball.

Superior Bearing Support

Superior bearing support of the blowout-proof stem ensures proper axial alignment and Zero Seat Leakage even on actuated valves.

Stem-Ball Alignment

The easy to read Position Indicator Disc (patent pending) increases the visibility and accuracy of stem and ball alignment into the valve seat. This is especially important when adding an actuator to a valve or resetting valve actuation. It is also critical in severe applications such as steam where positive, sustainable shutoff is critical and even slight misalignments will compromise the ball/seat sealing band. This indicator eliminates the need for costly and multiple manufacturing features that have traditionally been used with less accuracy.

The indicator is self-securing to the stem; no set screws are required.

In-line Servicing

In-line renewability can be accomplished in 30 minutes and restores Zero Leakage performance.

Integral Mounting Pad

An ISO-5211 integral mounting pad facilitates error-free, air, motor and gear operator actuation due to superior rigidity, precise alignment and a fully-guided stem bearing system. Lockout capability is standard.

Two-Year Warranty

Conval is committed to unsurpassed quality. We are so confident of the quality of our product, that we offer a two-year warranty.

STANDARD SIZES

1/2" through 4" Top Entry
SW, BW, FNPT and a variety of ends TDP-1-2013 compliant and full port valves available

PRESSURE RATING

ASME Class up to 4500

STANDARD MATERIALS

Carbon Steel SA-105
Stainless Steel SA-182-F316/F316L
Alloy SA-182-F22 Cl.3, SA-182-F91
Other materials available upon request

STANDARD ACCESSORIES

ISO-5211 Integral Mounting Pad Actuators -
Electric, Pneumatic or Hydraulic,
Gear Operator



*See product brochure
for more details.*

Swivldisc® Gate Valves

- Integral Gland Wrench
- In Line Repairable
- Adaptable for Air or Motor Actuators

The Conval CLAMPSEAL® Swivldisc Gate Valve delivers performance at the standard set by the legendary CLAMPSEAL® Globe Valve.

The Swivldisc wedge gate design employs a flexible disc face which permits the seating surfaces to achieve perfect alignment, establishing a leak tight seal not possible with standard wedge gates.

The simple and effective CLAMPSEAL® pressure seal bonnet provides ready access for servicing with no welds to cut or seal rings or gaskets to replace. The body-to-bonnet joint integrity is maintained through countless thermal cycles.

The Conval packing system delivers the best performance available. The one-piece gland with integral gland wrench is readily adjustable at anytime. Repacking can be accomplished by swapping the bonnet-chamber with the fresh pre-packed unit. The fine finish of the stem and chamber combines with high performance graphite packing to ensure long packing service life.

Selection of the CLAMPSEAL® Swivldisc is a commitment to quality and best value.

Conval's Swivldisc is the gate valve of choice when performance must be assured in the most demanding services.




Based on real-life experience, more HRSG maintenance supervisors and planners are choosing to replace original lower-quality, foreign-made valves with new Conval valves, including Swivldisc gate valves. If the original valves are actuated, Conval can match the footprint of the actuator for easy replacement.


Swivldisc Gate Valve with bypass



- **Swivldisc gate**
- **Pressure Seal Bonnet**
- **High Performance Graphite Packing**
- **One Piece Gland**
- **Unobstructed, Full Port Flow**




*See product brochure
for more details.*

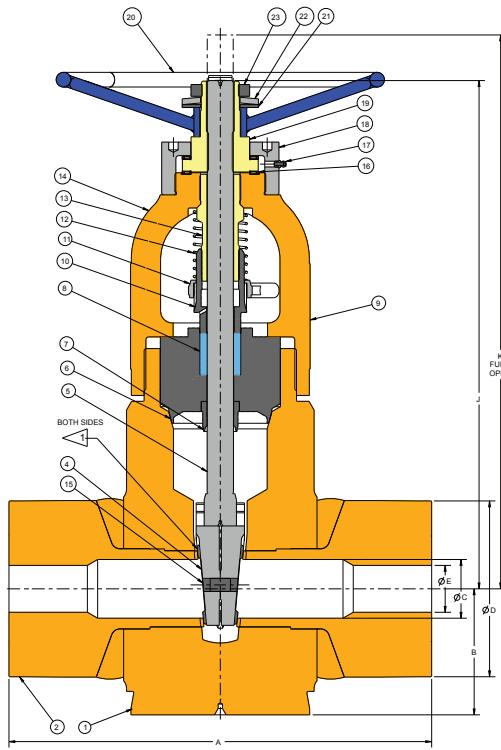

This exploded view diagram illustrates the internal components of a gate valve. The components are numbered from 1 to 23, and the diagram shows them disassembled to reveal the flow path and various sealing and structural elements.

NO.	NAME	QTY	MATERIALS		
1	BODY	1	ASME SA-216 Gr. WCB	ASME SA-217 Gr. WC9	ASTM A217 Gr. C12A
2	HUB	2	ASME SA-696 Gr. C	ASME SA-182 Gr. F22 Class 3	ASME SA-182 Gr. F91
			SEAT OVERLAY ON ALL HUBS: COBALT ALLOY #6		
3	DISC	1	UNS R31233	UNS R31233	UNS R31233
4	GATE	1	UNS R31233	UNS R31233	UNS R31233
5	STEM	1	ASME SA-479 Type XM-19H		
6	BONNET BACKSEAT	1	UNS S21800		
7	BONNET CHAMBER	1	ASME SA-479 Type 410	ASME SA-479 Type 410	ASME SA-479 Type 410
8	PACKING SET	1	HIGH DENSITY GRAPHITE		
9	NAME PLATE	1	ASME SA-240 Type 304		
10	GLAND	1	ASTM A582 Type 416	ASTM A582 Type 416	ASTM A582 Type 416
11	GLAND WRENCH	1	ASME 5360		
12	SPRING	1	MFG. STANDARD		
13	YODE BUSHING	1	ASME SB-150		
14	YODE	1	ASME SA-216 Gr. WCB Or ASME SA-105	ASME SA-217 Gr. WC9 Or ASME SA-182 Gr. F22 Class 3	ASME SA-217 Gr. WC9 Or ASME SA-182 Gr. F22 Class 3 Or ASME SA-182 Gr. F316
15	CLAMP BOLT	1	ASME SA-193 Gr. B8M		
16	GREASE FITTING	1	Commercial		
17	BEARING SET	2	Commercial		
18	BEARING CAP	1	MFG. STANDARD	MFG. STANDARD	MFG. STANDARD
19	STEM NUT	1	ASME SB-150		
20	PAINTED HANDWHEEL	1	MFG. STANDARD		
21	FLAT WASHER	1	MFG. STANDARD		
22	SPRING WASHER	1	Commercial		
23	JAM NUT	1	MFG. STANDARD	MFG. STANDARD	MFG. STANDARD
			ASME SA-479 Type 316		

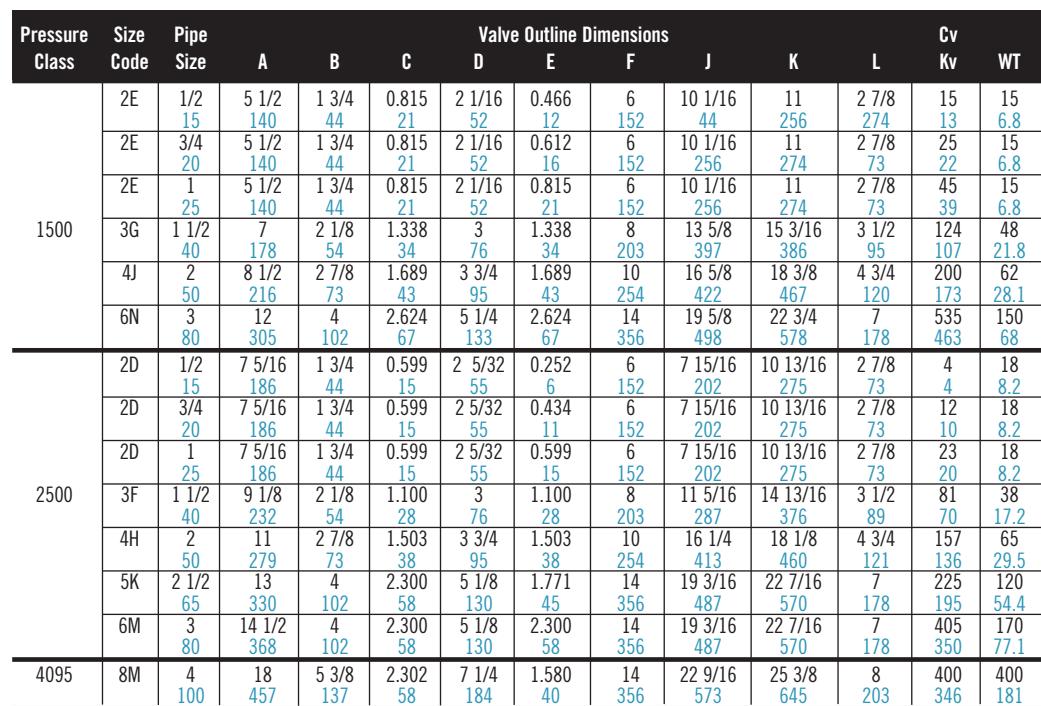


This table provides the outline dimensions for various sizes and pressure classes of the valve. The dimensions are listed in inches and millimeters. Blue numbers indicate dimensions in millimeters.

Pressure Class	Size Code	Pipe Size	Valve Outline Dimensions										Cv Kv	WT
			A	B	C	D	E	F	J	K	L			
1500	2E 1/2 15	5 1/2 140	1 3/4 44	0.815 21	2 1/16 52	0.466 12	6 152	10 1/16 44	11 256	2 7/8 274	15 13	15 6.8		
	2E 3/4 20	5 1/2 140	1 3/4 44	0.815 21	2 1/16 52	0.612 16	6 152	10 1/16 256	11 274	2 7/8 73	15 22	15 6.8		
	2E 1 25	5 1/2 140	1 3/4 44	0.815 21	2 1/16 52	0.815 21	6 152	10 1/16 256	11 274	2 7/8 73	15 39	15 6.8		
	3G 1 1/2 40	2 1/8 178	2 1/8 54	1.338 34	3 76	1.338 34	8 203	13 5/8 397	15 3/16 386	3 1/2 95	124 107	48 21.8		
	4J 2 50	8 1/2 216	2 7/8 73	1.689 43	3 3/4 95	1.689 43	10 254	16 5/8 422	18 3/8 467	4 3/4 120	200 173	62 28.1		
	6N 3 80	12 305	4 102	2.624 67	5 1/4 133	2.624 67	14 356	19 5/8 498	22 3/4 578	7 178	535 463	150 68		
2500	2D 1/2 15	7 5/16 186	1 3/4 44	0.599 15	2 5/32 55	0.252 6	6 152	7 15/16 202	10 13/16 275	2 7/8 73	4 4	18 8.2		
	2D 3/4 20	7 5/16 186	1 3/4 44	0.599 15	2 5/32 55	0.434 11	6 152	7 15/16 202	10 13/16 275	2 7/8 73	12 10	18 8.2		
	2D 1 25	7 5/16 186	1 3/4 44	0.599 15	2 5/32 55	0.599 15	6 152	7 15/16 202	10 13/16 275	2 7/8 73	23 20	18 8.2		
	3F 1 1/2 40	9 1/8 232	2 1/8 54	1.100 28	3 76	1.100 28	8 203	11 5/16 287	14 13/16 376	3 1/2 89	81 70	38 17.2		
	4H 2 50	11 279	2 7/8 73	1.503 38	3 3/4 95	1.503 38	10 254	16 1/4 413	18 1/8 460	4 3/4 121	157 136	65 29.5		
	5K 2 1/2 65	13 330	4 102	2.300 58	5 1/8 130	1.771 45	14 356	19 3/16 487	22 7/16 570	7 178	225 195	120 54.4		
6M 3 80	14 1/2 368	4 102	2.300 58	5 1/8 130	2.300 58	14 356	19 3/16 487	22 7/16 570	7 178	405 350	170 71.1			
4095	8M 4 100	18 457	5 3/8 58	2.302 184	1.580 40	14 356	22 9/16 573	25 3/8 645	8 203	400 346	400 181			

Numbers shown in Black indicate dimensions in inches, weight in pounds. Numbers shown in blue indicate dimensions in mm.

OTHER MATERIALS AVAILABLE UPON REQUEST


NO.	NAME	QTY	MATERIALS		
1	BODY	1	ASME SA-216 Gr. WCB	ASME SA-217 Gr. WC9	ASTM A217 Gr. C12A
2	HUB	2	ASME SA-696 Gr. C	ASME SA-182 Gr. F22 Class 3	ASME SA-182 Gr. F91
			SEAT OVERLAY ON ALL HUBS: COBALT ALLOY #6		
3	PIN	1	ASME SA-696 Gr. C	ASME SA-182 Gr. F22 Class 3	ASME SA-182 Gr. F91
4	GATE HALF	2	ASME SA-216 Gr. WCB	ASME SA-217 Gr. WC9	ASME SA-217 Gr. WC9
			OVERLAY ON EACH GATE HALF: COBALT ALLOY #6		
5	STEM	1	ASME SA-479 Type XM-19H		
6	BONNET BACKSEAT	1	UNS S21800		
7	BONNET CHAMBER	1	ASME SA-479 Type 410	ASME SA-479 Type 410	ASME SA-479 Type 410
8	PACKING SET	1	HIGH DENSITY GRAPHITE		
9	NAME PLATE	1	ASME SA-240 Type 304		
10	GLAND	1	ASTM A582 Type 416	ASTM A582 Type 416	ASTM A582 Type 416
11	GLAND WRENCH	1	ASME 5360		
12	SPRING	1	MFG. STANDARD		
13	YOKE BUSHING	1	ASME SB-150		
14	YOKE	1	ASME SA-216 Gr. WCB Or ASME SA-105	ASME SA-217 Gr. WC9 Or ASME SA-182 Gr. F22 Class 3	ASME SA-217 Gr. WC9 Or ASME SA-182 Gr. F22 Class 3 Or ASME SA-182 Gr. F316
15	CLAMP BOLT	1	ASME SA-193 Gr. B8M		
16	GREASE FITTING	1	Commercial		
17	BEARING SET	2	Commercial		
18	BEARING CAP	1	MFG. STANDARD	MFG. STANDARD	MFG. STANDARD
19	STEM NUT	1	ASME SB-150		
20	PAINTED HANDWHEEL	1	MFG. STANDARD		
21	FLAT WASHER	1	MFG. STANDARD		
22	SPRING WASHER	1	Commercial		
23	JAM NUT	1	MFG. STANDARD	MFG. STANDARD	MFG. STANDARD
			ASME SA-479 Type 316		

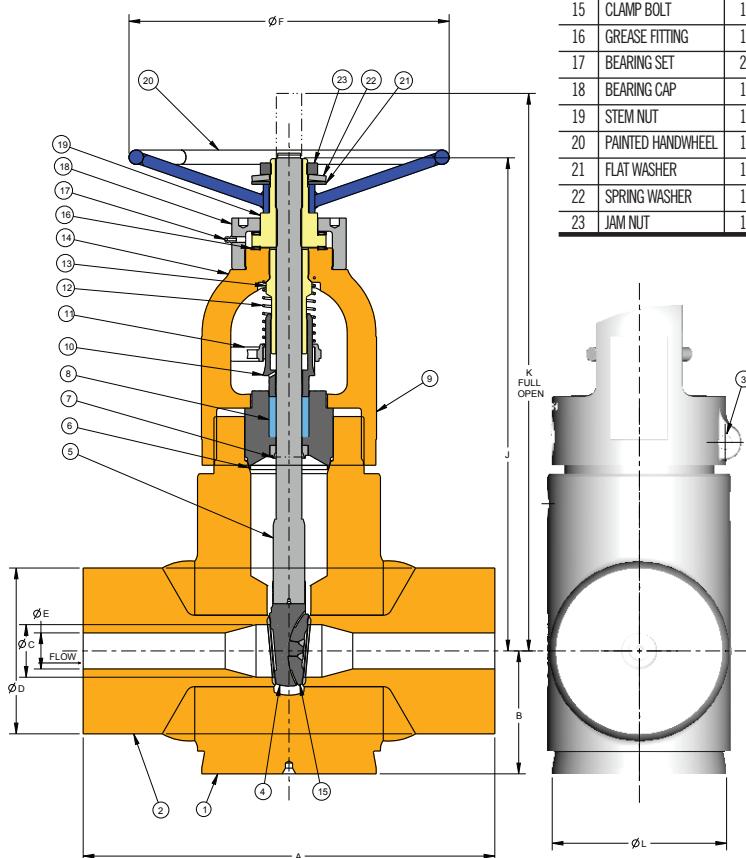

Pressure Class	Size Code	Pipe Size	Valve Outline Dimensions									Cv Kv	WT
			A	B	C	D	E	F	J	K	L		
1500	8R	4 100	16 406	5 3/8 137	3.438 87	6 3/4 171	3.438 87	14 356	21 9/16 548	26 660	7 1/2 191	958 829	220 100
3500	8N	4 100	16 406	5 3/8 137	2.875 73	7 1/2 190	1.500 38	14 356	21 11/16 551	24 9/16 624	8 203	530 459	540 245

Strainers

The CLAMPSEAL® design is available in a variety of in-line strainer configurations. Supplied as either a simple strainer with blowoff socket connection or strainer with integral blowoff valve, the CLAMPSEAL® is easily disassembled for element cleaning or changeout. The CLAMPSEAL® offers a versatile economical alternative for strainer requirements.

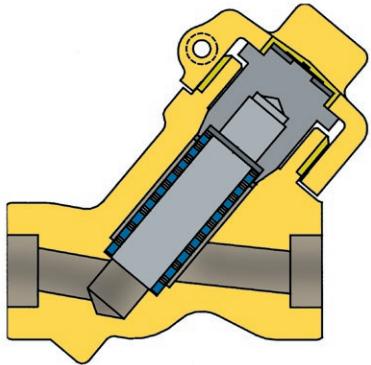

CLAMPSEAL® Strainer

Specifications:


Size:	1/2"	- 4"
Class:	600	- 4500
Material:	SA	105
	SA	182-F22
	SA	182-F91
	SA	182-F316

Standard Strainer

Element Hole Sizes: 1/32, 3/64, 1/16, 3/32, 1/8

Options: Mesh Lined Strainer Elements

Example: 0.75-11Y4-F22

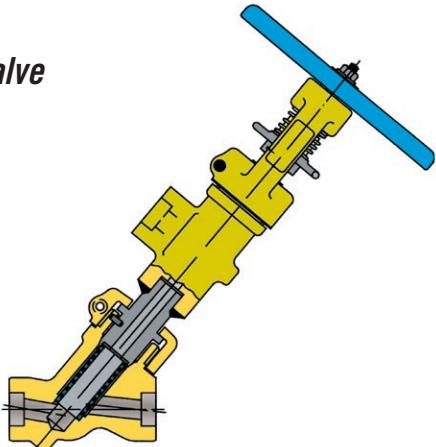

CLAMPSEAL® Strainer W/Blowoff Valve

Specifications:


Size:	1/2"	- 4"
Class:	600	- 4500
Material:	SA	105
	SA	182-F22
	SA	182-F91
	SA	182-F316

Standard Strainer

Element Hole Sizes: 1/32, 3/64, 1/16, 3/32, 1/8

Options: Mesh Lined Strainer Elements

Example: 0.50-13W2J-316

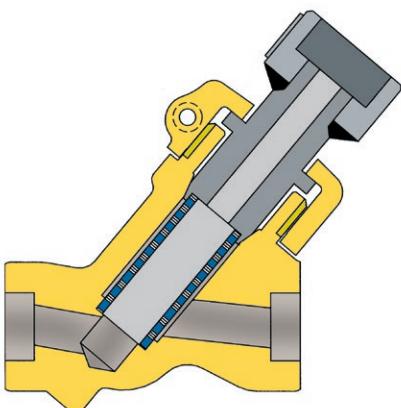

CLAMPSEAL® Strainer w/Blowoff Fitting

Specifications:

Size:	1/2"	- 4"
Class:	600	- 4500
Material:	SA	105
	SA	182-F22
	SA	182-F91
	SA	182-F316

Standard Strainer

Element Hole Sizes: 1/32, 3/64, 1/16, 3/32, 1/8

Options: Mesh Lined Strainer Elements

Example: 0.50-13X2-316

Blowoff bonnet enables use of any CLAMPSEAL® Valve as a flush point.

Whisperjets

High pressure drops can introduce severe erosion and wear. The Conval Whisperjet receives the high pressure inlet stream and discharges it through a series of multi pressure reduction stages called Whisperjets. Each Whisperjet section has four or six orifices around its perimeter. The orifices discharge inwardly, allowing the flow streams to impinge on each other rather than on the valve or sections themselves. These Whisperjets are designed to prevent sonic flow and critical pressure drops from occurring. By reducing the pressure in stages, cavitation, erosion, fluid velocity and sound level are minimized.

Many power plants have replaced competitors' pump recirculation control valves with Conval valves equipped with custom-engineered Whisperjets. Why?





Because the competitor valves' control velocity type trim limited mass flow and was causing the feed pumps to overheat. Today, the Clampseal/Whisperjet valves are still operating flawlessly and are regarded as excellent, reliable products in what all agree is a difficult situation.


Water

Specifications:


Type:	Angle, Y or T-pattern
Size:	1/2" thru 12"
Class:	ASME to 4500
End:	Socket Weld, Butt Weld
Material:	SA 182-F22, SA 182-F91, SA 105
Actuation:	Air, Motor, Manual
Applications:	Feedwater Pump Recirculation Bypass, Steel Mill Descaling Processes
Example:	1.00-22G2J-105

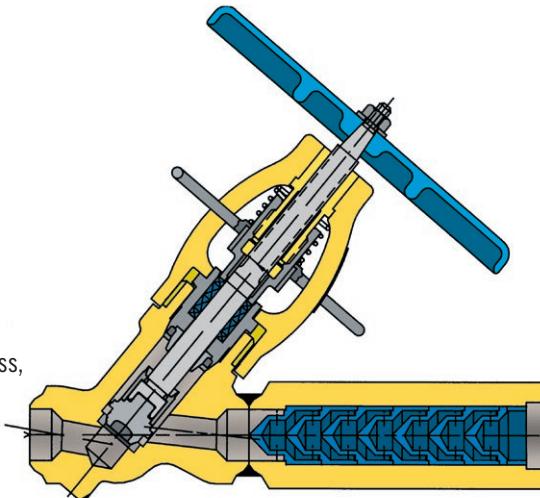

**See product brochure
for more details.**



**See product brochure
for more details.**

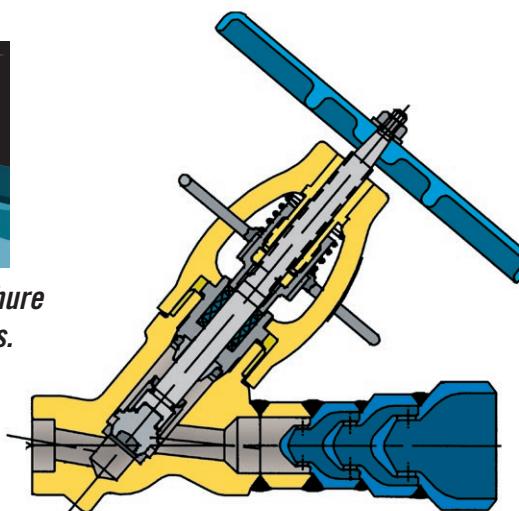

Steam



Specifications:

Type:	Angle, Y or T-pattern
Size:	1/2" thru 12"
Class:	ASME to 4500
End:	Socket Weld, Butt Weld
Material:	SA 182-F22, SA 182-F91, SA 105
Actuation:	Air, Motor, Manual
Applications:	Blowdown, Flash Tank Protection,Vents
Example:	1.50-23G2J-F22

Whisperjets provide for the progressive increase in specific volume as pressure drops.

Double Bellows Seal Valves

Meets all the requirements of MSS-SP117.

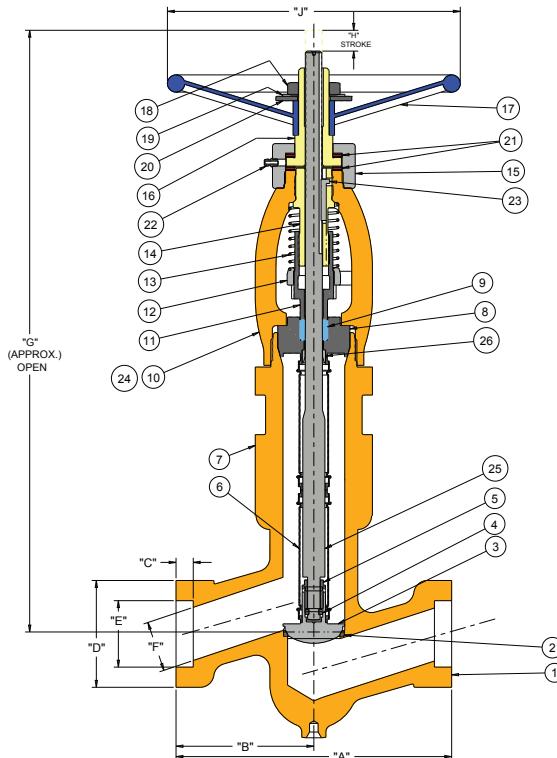

See product brochure
for more details.

DOUBLE

PRESSURE CLASS	Size CODE	PIPE Size	Approximate Cv Kv and Wgt. (Lbs.)/(kgs)								
			A	B	C	D	E	F	G	H	J
1500	6E	1/2	6 1/8	2 7/16	3/8	2 11/16	0.860	5/8	15 7/8	1.126	8
	15	156	62	62	10	68	21.8	16	403	28.6	203
	6E	3/4	6 1/8	2 7/16	1/2	2 11/16	1.070	5/8	15 7/8	1.126	8
	20	156	62	62	13	68	27.2	16	403	28.6	203
	6G	1	6 1/8	2 7/16	1/2	2 11/16	1.335	1	15 7/8	1.126	8
	25	156	62	62	13	68	33.9	25	403	28.6	203
	6G	1 1/4	6 1/8	2 7/16	1/2	2 11/16	1.680	1	15 7/8	1.126	8
	32	156	62	62	13	68	42.7	25	403	28.6	203
	8J	1 1/2	7 1/4	2 11/16	1/2	3 15/16	1.920	1 1/2	20 13/16	1.548	10
2500	40	184	68	68	13	100	48.8	38	529	39.3	254
	8J	2	7 1/4	2 11/16	5/8	3 15/16	2.411	1 1/2	20 13/16	1.548	10
	50	184	68	68	16	100	61.2	38	529	39.3	254
	10L	2 1/2	12	5 5/16	5/8	4 7/8	2.914	2 1/4	27 9/16	1.822	14
	65	305	135	135	16	124	74.0	57	700	46.3	356
	10L	3	12	5 5/16	*	4 7/8	*	2 1/4	27 9/16	1.822	14
	80	305	135	135	124			57	700	46.3	356
	10L	4	12	5 5/16	*	4 7/8	*	2 1/4	27 9/16	1.822	110
	100	305	135	135	124			57	700	46.3	356

BW dimensions supplied per customer requests. * All weights are approximate for shipping purposes only.

Numbers shown in Black indicate dimensions in inches, weight in pounds. Numbers shown in blue indicate dimensions in mm, weights in kilograms.

Lower Pressure (ASME Class 150#-900#) Bellows Seal Valves: Engineered for the demanding environments and regulations of severe service process control




APPLICATION

When leakage to the environment is not an option, the ingenious design and rugged construction of the Conval Bellows Seal Valve provides continuous, problem-free service. Whether your application media is toxic, corrosive, caustic or just plain expensive, Conval Bellows Seal Valves provide the optimal solution.

FEATURES

- **General Design and Wall Thickness:** ASME B16.34/API 602
- **Leak Proof Integrity:** Triple Redundancy via Bellows, Live Loaded Packing and Backseat
- **Low Weight and Seismic Profile:** Ideal for Nuclear Applications
- **Bellows Inspection and Test:** MSS SP-117/API 602
- **Cycle Life (900# Class):** Greater than 10,000 (1/2"-2"), 3,000 (2-1/2"-4")
- **Helium Leak Test:** Mass Spectrometer with less than 1×10^{-6} cc/sec leakage
- **Bellows Material:** Hydroformed, Multi-Ply Inconel 625 (other materials available)
- **Size Range:** $\frac{1}{2}''$ – 4" NPS
- **Pressure Range:** ASME Class 150#-900#*
- **End Connection:** Socket Weld, Butt Weld, Flange and Threaded
- **Configuration:** Y, T and Angle Pattern
- **In-Line Renewable:** Can be serviced in-line, resulting in shortened downtime and industry-leading, low life cycle costs

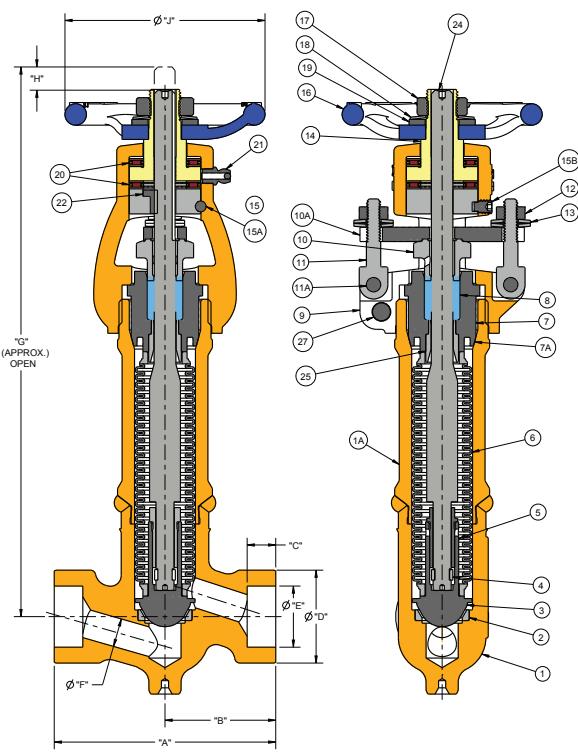

NO.	NAME	QTY	CARBON STEEL BODY	ALLOY STEEL BODY	STAINLESS STEEL BODY
1	BODY	1	ASME SA-105	ASME SA182-F22 class 3	ASME SA182-F316/316L
1A	BODY EXTENSION	1	ASME SA-106 Gr B ASME SA696 Gr C	ASME SA335 Gr P22 ASME SA182-F22 class 3	ASME SA312 Gr Type 316 ASME SA479 Type 316
2	SEAT	1	ASTM A5387 GR. 6		ASTM A732 GR. 21
3	DISC	1		ASTM B 815	
4	SPLIT RING	2		ASME SA479 TYPE XM-19H	
5	RETAINER	1		ASME SA479 Type 316	
6	BELLOWS ASSY	1		ASTM B443, UNS N06625	
7	BONNET	1	ASME SA479 TYPE 410		ASME SA479 TYPE 316
7A	BONNET SEAL RING				ASTM A732 GR. 21
8	PACKING SET	1		BRAIDED CARBON/GRAPHITE DIE FORMED FLEXIBLE GRAPHITE	
9	YOKE	1	ASME SA-105	ASME SA182-F22 class 3	ASME SA182-F316/316L
10	GLAND	1		ASTM A479 TYPE 316	
10A	GLAND PLATE	1		ASTM A240 TYPE 316	
11	SWING BOLT	2		ASTM A320 TYPE 303	
11A	GROOVED PIN	2		18-8 STAINLESS STEEL	
12	GLAND PLATE NUT	2		18-8 STAINLESS STEEL	
13	BELLEVILLE WASHER	4		301 STAINLESS STEEL	
14	STEM NUT	1		ASME SB-150,UNS C64200	
15	BEARING RETAINER	1		ASME SB-150,UNS C64200	
15A	GROOVED PIN	1		18-8 STAINLESS STEEL	
16	HANDLEWHEEL	1		ASTM A536	
17	JAM NUT	1		18-8 STAINLESS STEEL	
18	BELLEVILLE WASHER	1		301 STAINLESS STEEL	
19	FLAT WASHER	1		ASME B18.21.1 18-8 STAINLESS	
20	BEARING SET	2		BEARING STEEL	
21	GREASE FITTING	1		303 STAINLESS STEEL	
22	KEY	1		AMS 5596 718	
23	ID. TAG (NOT SHOWN)	1		304 STAINLESS STEEL	
24	STEM	1		ASTM SB637, UNS N07718 ASME SA479 TYPE XM-19H	
25	STEM GUIDE	1		ASTM A732 GR. 21	
26	WASHER	1		18-8 STAINLESS STEEL	
27	CLAMP BOLT	1		18-8 STAINLESS STEEL	

SIZE NPS DN	PRESSURE CLASS	A	B	C	D	E	F	G	H	J	CV	WEIGHT LB KG	SIZE CODE
1/2 <u>15</u>	900	3.88 <u>98</u>	1.94 <u>49</u>	.38 <u>10</u>	1.63 <u>41</u>	.86 <u>22</u>	.38 <u>10</u>	9.63 <u>245</u>	0.38 <u>10</u>	3.50 <u>89</u>	3.0	6.2 <u>2.8</u>	3C
3/4 <u>20</u>	900	3.88 <u>98</u>	1.94 <u>49</u>	.50 <u>13</u>	1.63 <u>41</u>	1.07 <u>27</u>	.50 <u>13</u>	9.63 <u>245</u>	0.38 <u>10</u>	3.50 <u>89</u>	3.7	6.2 <u>2.8</u>	3D
1 <u>25</u>	900	4.94 <u>125</u>	2.47 <u>63</u>	.50 <u>13</u>	2.25 <u>57</u>	1.34 <u>34</u>	.75 <u>19</u>	9.94 <u>253</u>	0.45 <u>11</u>	5.00 <u>127</u>	4.7	10.5 <u>4.7</u>	5F
1 1/4 <u>32</u>	900	4.94 <u>125</u>	2.47 <u>63</u>	.50 <u>13</u>	2.25 <u>57</u>	1.68 <u>43</u>	1.00 <u>25</u>	10.50 <u>267</u>	0.45 <u>11</u>	5.00 <u>127</u>	5.0	10.5 <u>4.7</u>	5G
1 1/2 <u>40</u>	900	8.50 <u>216</u>	4.25 <u>108</u>	.63 <u>16</u>	3.25 <u>83</u>	1.92 <u>49</u>	1.25 <u>32</u>	10.88 <u>276</u>	0.46 <u>16</u>	8.00 <u>203</u>	10.5	20.5 <u>9.3</u>	7H
2 <u>50</u>	900	8.50 <u>216</u>	4.25 <u>108</u>	.63 <u>16</u>	3.25 <u>83</u>	2.41 <u>61</u>	1.50 <u>38</u>	10.88 <u>276</u>	0.46 <u>16</u>	8.00 <u>203</u>	15.5	20.5 <u>9.3</u>	7J
2 1/2 <u>65</u>	900	10.25 <u>260</u>	5.13 <u>130</u>	.63 <u>16</u>	4.25 <u>108</u>	2.91 <u>74</u>	1.88 <u>48</u>	20.18 <u>512</u>	0.75 <u>19</u>	10.00 <u>254</u>	22.0	45 <u>20.4</u>	8K
3 <u>80</u>	900	10.25 <u>260</u>	5.13 <u>130</u>	*	4.25 <u>108</u>	*	2.25 <u>58</u>	20.18 <u>512</u>	0.75 <u>19</u>	10.00 <u>254</u>	35.0	45 <u>20.4</u>	8L
4 <u>100</u>	900	12 <u>305</u>	6.00 <u>152</u>	*	4.25 <u>108</u>	*	2.63 <u>67</u>	20.18 <u>512</u>	0.75 <u>19</u>	10.00 <u>254</u>	48.0	45 <u>20.4</u>	8M

Special Application Valves

The CLAMPSEAL® design is uniquely suited to a number of special applications where service demands require rugged construction while retaining easy in-line serviceability. No other forged valve offers this variety of applications.



Tandem Blowdown

Traditional bottom blowdown service requires a tandem valve. Unlike older massive designs with limited serviceability, the CLAMPSEAL® unit tandem valve offers compactness, lighter weight and easy maintainability as well as longevity of service.

Specifications:

Size/Style:	1" - 2 1/2"	Material:	SA 105
Class:	ASME to 4500		SA 182-F22
End:	Socket Weld, Butt Weld, Clamp Connector	Example:	1.00-12B8HJ-105



Cryogenic Service

High pressure cryogenic service demands special attention to design and quality of material and fabrication. The CLAMPSEAL® delivers tight shutoff and operability through a wide temperature range and meets ANSI B 31.3 requirements.

Specifications:

Size:	1/2" - 4"	Temperature:	To -320°F
Class:	ASME 1500 and 2500	Material:	SA 182-316
		Example:	1.00-12J2J-316



Fire-Safe Service

Fire-safe service is ideal for refining and chemical plants where fire safety is a major concern. CLAMPSEAL® globe valves may be retrofitted with this fire-safe capability, which meets API Standard 6FA.

Specifications:

Size:	1/2" - 4"	Material:	A105, F22, F91, F316, F347,
Class:	ASME/ANSI Class 900-2500		Inconel, Monel
Temp.	To 1800°F	Example:	1.50-13C8J-A105



Three-Way Service

Conval has responded to the need for a high pressure, high temperature 3-way valve with easy serviceability for both seats. Excellent service history and versatility make the CLAMPSEAL® valve the choice for 3-way service.

Specifications:

Size:	1 1/2" - 3"	Material:	Carbon Steel: (WCB)
Class:	ASME to 2500		Low Alloy: (WC9)
End:	Socket Weld, Butt Weld, Flanged, Clamp Connector		Stainless: (CF8M)

Example: 1.50-13Z4J-316

Special Application Valves




Naval Boiler Blowdown

The CLAMPSEAL® Naval Boiler Blowdown valve meets the requirements of MIL-V-17737 and other applicable specifications.

Specifications:

Size:	1 1/2"
Type:	I (Handwheel) or II (T-handle)
Class:	1 (600 lb) or 2 (1500 lb)
Style:	Straightaway (Y) or Angle

Material:	Carbon Steel or Alloy Steel
Example:	1.50-12G8CJ-N05
NSN:	4820-01-124-3694, 4820-01-140-4834 4820-01-018-3780, 4820-01-018-3781

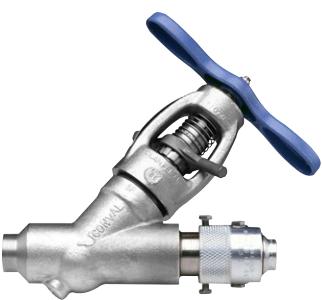

SaVD Series Safe Vent Drain

Now you can add a simple, single-weld, dual sealing system to Clampseal Y-pattern valves to enhance leak-free performance and allow for fast, safe, environmentally-friendly venting and draining of piping systems.

Specifications:

Size:	1/2" - 2"
Type:	Y-Pattern; NPT, BW, SW Ends
Class:	Thru ASME 2500#

Material:	Stainless Steel A479-F316, A105, F22 and other materials upon request.
Options:	Securing Chain, Rodable Cap



Urea Service

Urea Service is designed for high-pressure piping of urea reactors, strippers and condensers. Ideal for use with ammonium carbonate, nitric acid, and urea process fluids.

Specifications:

Size:	1/2" - 4"
Type:	Y-Pattern; NPT, BW, SW Ends
Class:	ASME Class 900-2500

Material:	Forged Stainless Steel
Example:	2.00-12A0Z-252

Actuators

Conval CLAMPSEAL® valves are easily adapted to electric motor or pneumatic actuation. Valves ordered with actuators are assembled, functionally tested at Conval and shipped ready for installation, using your preferred brand of actuator. Where customers have existing actuators, the CLAMPSEAL® valve is provided with appropriate yoke flange and stem adaptor. All actuated valves are furnished with an integral gland wrench.



Electric Motor Actuated

Specifications:

Size:	1/2" - 4"
Class:	thru 4500
Material:	SA 105 SA 182-F22 SA 182-F91 SA 182-F316
Options:	Local Position Indicator



Pneumatic Actuated

Specifications:

Size:	1/2" - 4"
Class:	thru 4500
Material:	SA 105 SA 182-F22 SA 182-F91 SA 182-F316
Options:	Fail Open/Fail Closed Manual Override Limit Switches AC or DC Solenoid


See Page 37 for Figure Number OPTION selection

Clampseal® Custom End Connections


Custom, extended end connections can simplify the retrofitting of Clampseal valves to replace other manufacturer's Y-pattern valves.

For applications with F91 material, extended end connections enable welders to cut back to "virgin" pipe as required.

For applications with Post Weld Heat Treat (PWHT), extended end connections allow for welds further away from the seat.

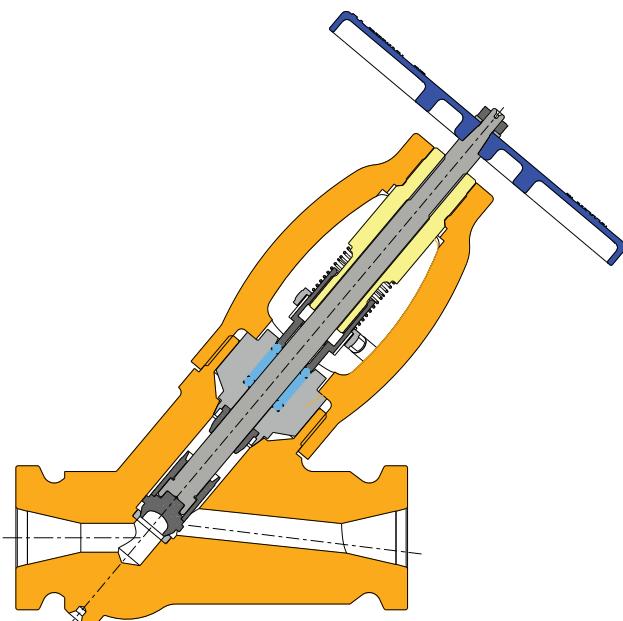

Clamp Connector End

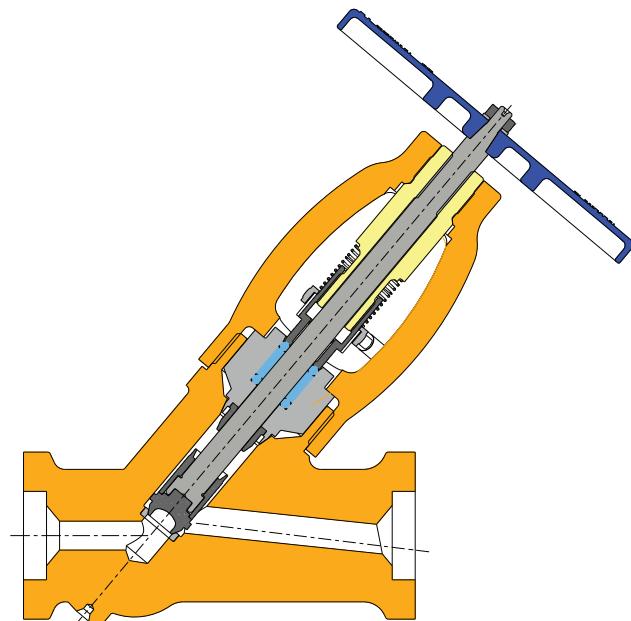

Extended Y-Pattern Body Valve

Socket Weld shown, Butt Weld also available

Pressure Class	Size Code	Pipe Size	Conval Extended Y-Pattern Body Valve	Conval Extended Y Pattern Body Valve with Pipe Extensions	Competitor A	Competitor B	Competitor C
			K				
1500#		3/4 - 1 20 - 25	7.50 190	10.50 267	6.00 152	4.375 - 5.00 111 - 127	4.375 - 5.00 111 - 127
2500#	5	3/4 - 1 20 - 25	7.50 190	10.50 267	6.00 152	5.00 127	4.375 - 5.00 111 - 127
4500#		1/2 13	7.50 190	10.50 267	8.20 208	7.25 184	5.75 146
1500#		1 1/2 40	9.50 241	12.00 305	6.70 170	6.25 159	7.25 184
2500#	7	1 1/4 - 1 1/2 32 - 40	9.50 241	12.00 305	6.70 170	7.25 184	7.25 184
4500#		1 - 1 1/2 25 - 40	9.50 241	12.00 305	8.20 208	7.25 - 9.625 184 - 244	12.00 305
1500#		2 50	11.00 279	13.50 343	8.20 208	7.25 184	10.13 257
2500#	8	2 50	11.00 279	13.50 343	10.70 272	9.63 244	10.13 257
4500#		2 50	11.00 279	13.50 343	12.80 325	9.63 244	12.00 305

Numbers shown in Black indicate dimensions in inches, weight in pounds. Numbers shown in blue indicate dimensions in mm.

Conval Clampseal® API-602 Globe Valves are designed and built for the demanding environments (e.g. pressure and temperature extremes) of onshore and offshore drilling and production, refining, heavy oil and sour gas applications



Canadian Registration
Numbers for all provinces



APPLICATION

Conval Clampseal API-602 Globe Valves are designed and built for the demanding environments (e.g. pressure and temperature extremes) of onshore and offshore drilling and production, refining, heavy oil and sour gas applications.

FEATURES

General Design and Wall Thickness: ASME B16.34/API 602.

API 624 Certified: Assures low fugitive emission performance. Third Party reports available on request.

Integral Gland Wrench (IGW): The IGW allows for easy packing adjustments and for locking the packing in place. System vibration cannot loosen the packing gland (concentric 360 degree packing load).

NACE: ISO 15156 / MR0103 Compliance Available.

High Performance Packing System: The Clampseal packing system incorporates corrosion-inhibiting, high density graphitic packing, certified to API 622. Live loading on request.

Rapid In-Line Repairability: The Clampseal valve line provides a modular solution to rising maintenance expense. Rapid, reliable in-line servicing makes for less down time.

Quality Certifications: ISO 9001, European Pressure Equipment Directive (PED), Nuclear N Stamp, Canadian Registration Number, and many more. Conval complies with all applicable API standards.

Configuration: Y, T and Angle Patterns.

Size Range: $\frac{1}{2}$ " – 2-1/2" NPS*.

Pressure Range: ASME Class 150# – 1500# **


End Connection: Socket Weld, Butt Weld, Flanged, Hub and Threaded.

Electroless Nickel Plated Finish: Contributes to extended service life.

*Valves through 4" available. Please consult the factory.

** Valves rated to Class 4500# are available. Please consult the factory.

CLAMPSEAL® API-602 GLOBE VALVE STANDARD TRIM & VALVE MATERIALS

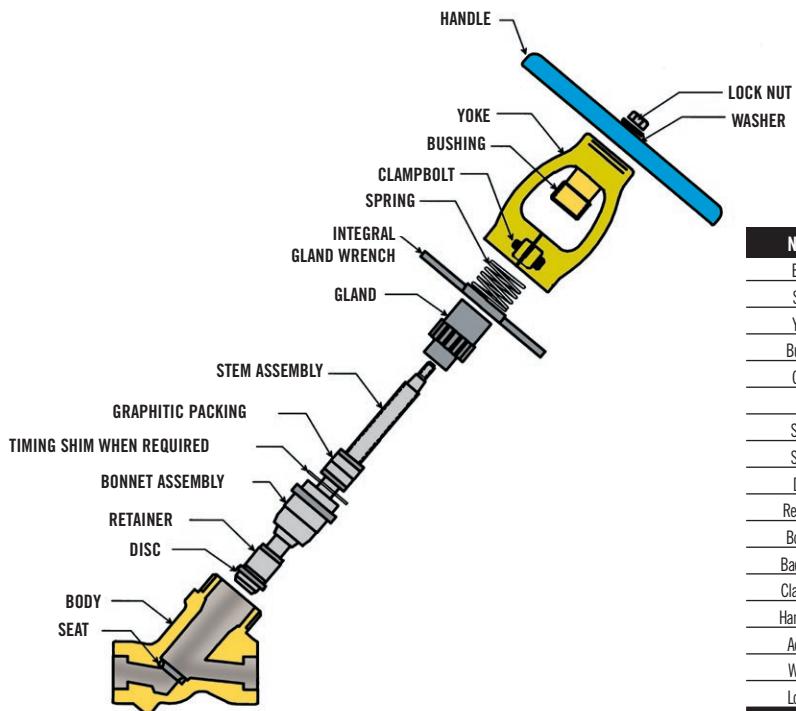


Name	Carbon Steel	Low Alloy Steel	Stainless
Body*	SA-105	SA-182 F22 or SA-182 F91	SA-182 F316
Seat*		Cobalt Alloy AMS 5387	
Yoke*	SA-105	SA-182 F22	SA-182 F316
Bushing		ASME SB-150, UNS C64200	
Gland		SA-582 Type 416	SA-479 Type 316
IGW		AMS 5370	
Spring		Stainless	
Stem*	SA-582 Type 416 or SA-479 Type 410		SA-479 Type XM-19H
Disc*		Cobalt Alloy AMS 5387	
Retainer*	SA-479 Type 316 or SA-582 Type 416		SA-479 Type 316
Bonnet*		SA-479 Type 410	SA-479 Type 316
Backseat*		SA-479, UNS 521800	
Clampbolt		Mfg. Standard Stainless	
Handwheel		Malleable Iron	
Adaptor		Malleable Iron	
Washer		Mfg. Standard Stainless	
Locknut		Mfg. Standard Stainless	

*Other Alloys Available on Request

CLAMPSEAL® API-602 Y-PATTERN GLOBE VALVE DIMENSIONS

Size Code	NPS	Class	A		B	C	D	E	F	G	H	J	Cv	Weight (lbs)
			SW	BW										
3D	0.50	800	3.75	3.75	1.50	0.38	1.63	0.86	0.50	7.53	0.56	6.50	6	5
3D		1500	3.75	3.75	1.50	0.38	1.63	0.86	0.50	7.53	0.56	6.50	6	5
5E	0.75	800	4.50	4.75	1.75	0.50	2.33	1.07	0.63	9.47	0.69	8.00	9	11
5E		1500	4.50	4.75	1.75	0.50	2.33	1.07	0.63	9.47	0.69	8.00	9	11
5F	1.00	800	4.50	4.75	1.75	0.50	2.33	1.34	0.82	9.57	0.75	8.00	15	10
5F		1500	4.50	4.75	1.75	0.50	2.33	1.34	0.82	9.57	0.75	8.00	15	10
5G	1.25	800	4.50	4.75	1.75	0.50	2.33	1.68	1.01	10.01	1.19	8.00	24	9
7G		1500	6.25	6.50	2.56	0.50	3.25	1.68	1.01	12.72	1.19	12.00	24	15
6H	1.50	800	5.50	6.13	2.13	0.50	2.69	1.92	1.26	10.64	1.19	8.00	36	14
7H		1500	6.25	6.50	2.56	0.50	3.25	1.92	1.26	12.73	1.19	12.00	38	22
7J	2.00	800	6.25	6.50	2.56	0.63	3.25	2.41	1.51	12.88	1.25	12.00	61	21
8J		1500	7.25	7.25	2.69	0.63	3.94	2.41	1.51	14.67	1.56	12.00	62	45
8K	2.50	800	7.25	7.25	2.69	0.63	3.94	2.92	1.88	14.72	1.75	12.00	86	43
9K		1500	9.00	9.63	3.63	0.63	4.38	2.92	1.88	16.56	2.00	24.00	86	71


Dimensions are in inches.

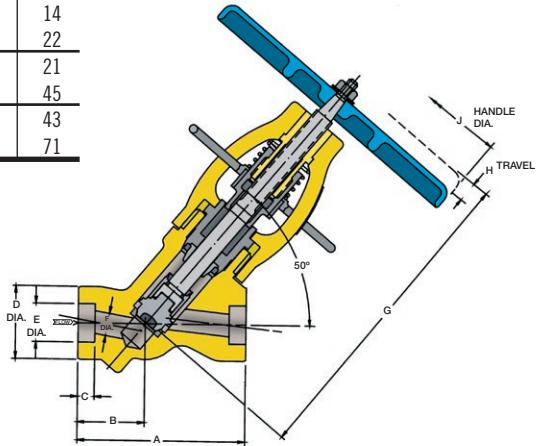

CLAMPSEAL® API-602 T-PATTERN GLOBE VALVE DIMENSIONS

Size Code	NPS	Class	A	B	C	D	E	F	G	H	J	Cv	Weight (lbs)
3D	0.50	800	5.00	1.48	0.38	1.63	0.86	0.50	7.48	0.56	6.50	4	6
3D	0.50	1500	5.00	1.48	0.38	1.63	0.86	0.50	7.53	0.56	6.50	4	6
5E	0.75	800	6.50	1.85	0.50	2.33	1.07	0.63	9.47	0.69	8.00	6	13
5E	0.75	1500	6.50	1.85	0.50	2.33	1.07	0.63	9.47	0.69	8.00	6	13
5F	1.00	800	6.50	1.88	0.50	2.33	1.34	0.82	9.57	0.75	8.00	9	12
5F	1.00	1500	6.50	1.88	0.50	2.33	1.34	0.82	9.57	0.75	8.00	9	12
7G	1.25	800	8.50	3.07	0.50	3.25	1.68	1.00	12.66	1.19	12.00	14	25
7G	1.25	1500	8.50	3.07	0.50	3.25	1.68	1.00	12.66	1.19	12.00	14	25
7H	1.50	800	8.50	3.07	0.50	3.25	1.92	1.25	12.66	1.19	12.00	22	24
7H	1.50	1500	8.50	3.07	0.50	3.25	1.92	1.25	12.66	1.19	12.00	22	24
8J	2.00	800	10.00	3.79	0.63	4.00	2.41	1.50	14.37	1.56	12.00	32	55
8J	2.00	1500	10.00	3.79	0.63	4.00	2.41	1.50	14.67	1.56	12.00	32	55
8J	2.50	1500	10.00	3.79	0.63	4.00	2.92	1.50	14.83	1.56	12.00	32	55


Dimensions are in inches.

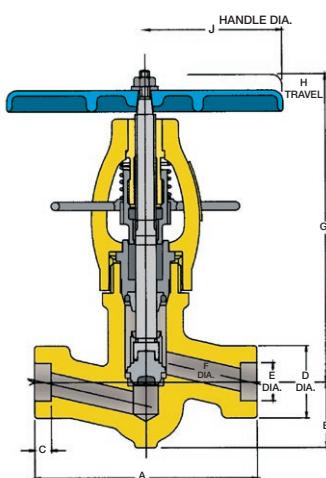

CLAMPSEAL® API-602 A-PATTERN GLOBE VALVE DIMENSIONS

Size Code	NPS	Class	A	B	C	D	E	F	G	H	J	Cv	Weight (lbs)
3D	0.50	800	1.75	1.75	0.38	1.63	0.86	0.50	7.09	0.56	6.50	7	5
3D	0.50	1500	1.75	1.75	0.38	1.63	0.86	0.50	7.09	0.56	6.50	7	5
5E	0.75	800	2.31	2.31	0.50	2.33	1.07	0.63	8.85	0.69	8.00	9	11
5E	0.75	1500	2.31	2.31	0.50	2.33	1.07	0.63	8.85	0.69	8.00	9	11
5F	1.00	800	2.31	2.31	0.50	2.33	1.34	0.81	8.95	0.75	8.00	16	10
5F	1.00	1500	2.31	2.31	0.50	2.33	1.34	0.82	8.95	0.75	8.00	16	10
7G	1.25	800	4.25	2.75	0.50	3.25	1.68	1.01	11.85	1.19	12.00	23	23
7G	1.25	1500	4.25	2.75	0.50	3.25	1.68	1.01	11.85	1.19	12.00	23	23
7H	1.50	800	4.25	2.75	0.50	3.25	1.92	1.26	11.85	1.19	12.00	38	21
7H	1.50	1500	4.25	2.75	0.50	3.25	1.92	1.26	11.85	1.19	12.00	38	21
7J	2.00	800	4.25	2.75	0.63	3.25	2.41	1.51	11.80	1.25	12.00	54	20
8J	2.00	1500	4.50	3.00	0.63	3.94	2.41	1.51	13.67	1.56	12.00	54	42
8K	2.50	800	4.50	3.00	0.63	3.94	2.92	1.88	13.53	1.75	12.00	74	39
10L	2.50	1500	6.00	5.00	0.63	4.88	2.92	2.25	16.94	2.13	24.00	124	107

Dimensions are in inches.

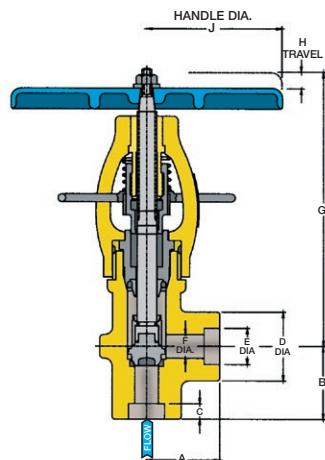

Clampseal® and Camseal® Automated Valves

- **Automate for Precise Closure**
- **Eliminate Excessive Steam Dumping**
- **Reduce Treated Water Replacement**
- **Monitor and Control Remotely**
- **Extend Product Life**
- **Reduce Labor Costs**



DESIGN FEATURES

Automates Closure

Significant savings in labor costs are realized by fully automating the operation of the valves. Automated closure also assures consistent, precise closure. Actuators will apply the proper force to close valves every time, for tight shut-off and long valve life.

Saves Steam

Any number of valves can be opened or closed at one time, to eliminate excessive steam dumping.

Reduces Treated Water Replacement

With automated vents and drains, there is less of a need to replace treated water, as less steam or water is evacuated from the system.

Evacuates Condensate

Steam trap condensate evacuation is accomplished by programming the open/close cycle on regular intervals to suit the application. Fully automated sensing and draining of condensate can be offered if required.

Signals Open/Closed Position in Control Room

Automated valves can be easily instrumented for control room indication.

Integrates with Computerized Plant Operations

The process can be fully automated and integrated with plant hardware/software.

Actuated Clampseal® Globe Valves



Automated globe valves are available in angle, Y, and T-pattern configurations. Valves are repairable in-line, with no welds to remove and replace. A complete line of tools for repair are available. Seats may be cut, ground and lapped. Disc can be turned or replaced, and lapped to the seat. Valves can be programmed to close, partially open, then close for seat cleansing, assuring tight shut-off. Thermal growth is accommodated by the air actuator and by an optional spring pack with the electric actuator.

Actuated Camseal® Ball Valves



Top entry ball valves feature in-line replaceable cartridge. The cartridge with new seat and ball is fully factory-tested to assure tight shut-off. Valve has indicator window and marked stem, to assure proper in-line ball alignment in open and closed positions. Integral ISO mounting flange supplied as standard.

Globe and ball valves are available with all types of actuators. Conval also offers air actuators with direct mount for solenoids.

Service Tool Cross Reference

Size Code	Tool Kit	Stop	Lapping Tools	Rear Packing	Yoke Wrench*	Gland Torque Wrench	Refacing Tool
			Check	Bonnet	Tool		
3C	TK3C-C-S-1	T3C-L	T3C-LC	T3C-LB-1	T3-RP-1	T3/6-YW-1	T3-GTW-1
3D	TK3D-C-S-1	T3D-L	T3D-LC	T3D-LB-1	T3-RP-1	T3/6-YW-1	T3-GTW-1
5C	TK5C-C-S-1	T5C-L	T5C-LC	T5C-LB-1	T3-RP-1	T3/6-YW-1	T3-GTW-1
5D	TK5D-C-S-1	T5D-L	T5D-LC	T5C-LB-1	T3-RP-1	T3/6-YW-1	T5C-R
5E	TK5E-C-S-1	T5EF-L	T5EF-LC	T5EF-LB-1	T5-RP-1	T3/6-YW-1	T5-GTW-1
5F	TK5F-C-S-1	T5EF-L	T5EF-LC	T5EF-LB-1	T5-RP-1	T3/6-YW-1	T5-GTW-1
5G	TK5G-C-S-1	T5G-L	T5G-LC	T5G-LB-1	T5-RP-1	T3/6-YW-1	T5-GTW-1
6E	TK6E-C-S-1	T6E-L	T6E-LC	T6E-LB-1	T5-RP-1	T3/6-YW-1	T6-GTW-1
6G	TK6G-C-S-1	T6GH-L	T6GH-LC	T6GH-LB-1	T5-RP-1	T3/6-YW-1	T6-GTW-1
6H	TK6H-C-S-1	T6GH-L	T6GH-LC	T6GH-LB-1	T5-RP-1	T3/6-YW-1	T6H-R
7E	TK7E-C-S-1	T7E-L	T7E-LC	T7E-LB-1	T5-RP-1	T7/10-YW-1	T7-GTW-1
7F	TK7F-C-S-1	T7F-L	T7F-LC	T7F-LB-1	T7-RP-1	T7/10-YW-1	T7F-R
7G	TK7G-C-S-1	T7GH-L	T7GH-LC	T7GH-LB-1	T7-RP-1	T7/10-YW-1	T7G-R
7H	TK7H-C-S-1	T7GH-L	T7GH-LC	T7GH-LB-1	T7-RP-1	T7/10-YW-1	T7H-R
7J	TK7J-C-S-1	T7J-L	T7J-LC	T7J-LB-1	T7-RP-1	T7/10-YW-1	T7J-R
8F	TK8F-C-S-1	T8F-L	T8F-LC	T8F-LB-1	T7-RP-1	T7/10-YW-1	T8F-R
8G	TK8G-C-S-1	T8G-L	T8G-LC	T8G-LB-1	T8-RP-1	T7/10-YW-1	T8-GTW-1
8H	TK8H-C-S-1	T8HJ-L	T8HJ-LC	T8HJ-LB-1	T8-RP-1	T7/10-YW-1	T8H-R
8J	TK8J-C-S-1	T8HJ-L	T8HJ-LC	T8HJ-LB-1	T8-RP-1	T7/10-YW-1	T8J-R
8K	TK8K-C-S-1	T8K-L	T8K-LC	T8K-LB-1	T8-RP-1	T7/10-YW-1	T8K-R
9G	TK9G-C-S-1	T9G-L	T9G-LC	T9G-LB-1	T8-RP-1	T7/10-YW-1	T9G-R
9H	TK9H-C-S-1	T9H-L	T9H-LC	T9H-LB-1	T8-RP-1	T7/10-YW-1	T9H-R
9J	TK9J-C-S-1	T9JK-L	T9JK-LC	T9JK-LB-1	T9-RP-1	T7/10-YW-1	T9J-R
9K	TK9K-C-S-1	T9JK-L	T9JK-LC	T9JK-LB-1	T9-RP-1	T7/10-YW-1	T9K-R
9L	TK9L-C-S-1	T9L-L	T9L-LC	T9L-LB-1	T9-RP-1	T7/10-YW-1	T9L-R
10H	TK10H-C-S-1	T10H-L	T10H-LC	T10H-LB-1	T8-RP-1	T7/10-YW-1	T10H-R
10J	TK10J-C-S-1	T10J-L	T10J-LC	T10J-LB-1	T9-RP-1	T7/10-YW-1	T10J-R
10K	TK10K-C-S-1	T10KL-L	T10KL-LC	T10KL-LB-1	T10-RP-1	T7/10-YW-1	T10K-R
10L	TK10L-C-S-1	T10KL-L	T10KL-LC	T10KL-LB-1	T10-RP-1	T7/10-YW-1	T10L-R
10M	TK10M-C-S-1	T10M-L	T10M-LC	T10M-LB-1	T10-RP-1	T7/10-YW-1	T10M-R



* Optional snap-on torque handle available through SNAP-ON™.

Conval Tool Kits


CLAMPSEAL® valves are designed to provide years of dependable service and to allow rapid in-line repair. Quick disconnect yoke and bonnet design provide fast access to valve trim for inspection and repair.

Conval's seat refacing tools cut through all types of seat damage leaving a smooth seat finish in minutes. Solid seats allow for repeated resurfacing.

Typical repair operations can be completed in under one hour making repair much more economical than replacement.

Conval's Tool Kits consist of:

- 1 Disk to Seat Mate Lapping Tool
- 2 Bonnet Lapping Tool
- 3 (2) Allen Wrenches
- 4 Seat Refacing Tool
- 5 Lapping Compound
- 6 High Spot Blue No. 107
- 7 Gland Wrench
- 8 Repacking Tool
- 9 Yoke Wrench
- 10 Servicing Instructions



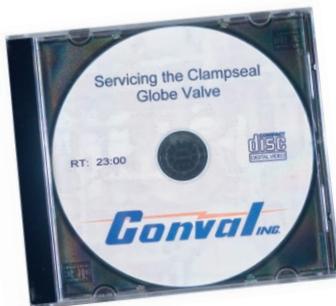


Servicing Instruction videos are available on CD or DVD and online at Conval.com.




A Typical Conval Tool Kit

Standard Parts & Material List

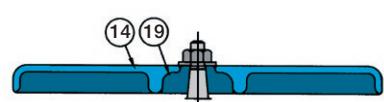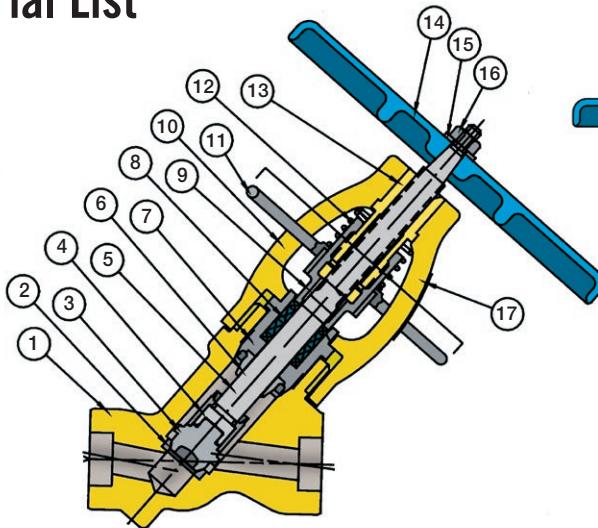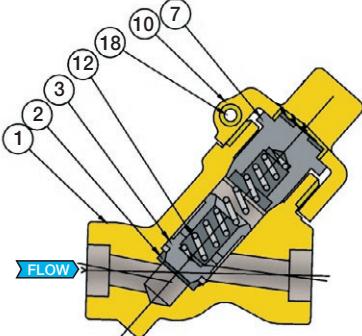

Impact Handle/Handwheel
used on size codes 8G to 10M



SECTION A-A

Globe Valve

NO.	NAME	Carbon Steel	Low Alloy	Stainless
1	Body	SA-105	SA-182 F22 or SA-182 F91	SA-182 F316
2	Seat	Cobalt Alloy-AMS 5387	Cobalt Alloy-AMS 5387	ASTM A732 GR21
3	Disc	Cobalt Alloy-AMS 5387	Cobalt Alloy-AMS 5387	Cobalt Alloy-AMS 538
4	Retainer	ASTM A 582 416	ASTM A 582 416	SA-479 316
5	Stem	ASTM A 582 416	ASTM A 582 416	SA479-UNS S20910
6	Stem Guide	ASTM A 732 GR21	ASTM A 732 GR21	ASTM A732 GR21
7	Bonnet/Chamber	SA479-410	SA479-410	SA479-TYPE 316
8	Packing Set	Flexible Graphite	Flexible Graphite	Flexible Graphite
		Die Formed Packing Rings	Die Formed Packing Rings	Die Formed Packing Rings
		Braided Carbon Yarn Wiper Rings	Braided Carbon Yarn Wiper Rings	Braided Carbon Yarn Wiper Rings
9	Gland	ASTM A 582 416	ASTM A 582 416	ASME SA-479 316
10	Yoke	SA-105	SA-182 F22	SA-182 F316
11	I.G.W.1	AMS 5370	AMS 5370	AMS 5370
12	Spring	Stainless	Stainless	Stainless
13	Bushing	ASME SB-150-C64200	ASME SB-150-C64200	ASME SB-150-C64200
14	Handle/Handwheel	Malleable Iron	Malleable Iron	Malleable Iron
15	Washer2	Steel	Steel	Stainless
16	Locknut	Steel	Steel	Steel
17	ID Plate	Stainless Steel	Stainless Steel	Stainless Steel
18	Clampbolt	Stainless	Stainless	Stainless
19	Impact Adaptor	Malleable Iron	Malleable Iron	Malleable Iron
20	Retainer Washer	Steel	Steel	Steel

¹ Integral Gland Wrench

² Retainer Washer required with sizes 8, 9 and 10

Check Valve

NO.	NAME	Carbon Steel	Low Alloy	Stainless
11	Body	SA-105	SA-182 F22, SA-182 F91	SA-182 F316
2	Seat	Cobalt Alloy-AMS 5387	Cobalt Alloy-AMS 5387	ASTM A732 GR21
3	Piston	Cobalt Alloy-AMS 5387	Cobalt Alloy-AMS 5387	Cobalt Alloy-AMS 538
4	Spring	Inconel X No. 1 Temper	Inconel X No. 1 Temper	Inconel X No. 1 Temper
5	Clampbolt	Stainless	Stainless	Stainless
6	Yoke	SA-105	SA-182 F22	SA-182 F316
7	Bonnet	SA479-UNS S20910	SA479-UNS S20910	SA479-316/ASTM A732 GR21
8	ID Plate	Stainless Steel	Stainless Steel	Stainless Steel

Clampseal Figure Number Description

Nominal Pipe Size — **1.00-13G2J-F225E-3199**

Engineering Code¹ (Internal Only)

Product Type ————— Size Code
Pressure Class ————— Material
Valve Design ————— Option
End Connection

¹ Engineering Code assigned by Conval is a key to Engineering Bill of Material and will appear on all packing lists and invoices. This code need not be supplied when ordering unless a specific configuration is being reordered.

PRODUCT TYPE	ASME PRESSURE CLASS	VALVE DESIGN	END CONNECTIONS
1 Globe Valve	Nominal	Intermediate	A Angle Pattern Stop
2 Whisperjet	0 Under 900		B Tandem Blowdown:
3 Y-Body - Extended Body	1 900	1195	C 2 Angle Bodies
4 Desuperheater	2 1500	2155	D Y-Pattern Check
5 Gate	3 2500	3045	E Angle Pattern Check
	4 3500	4095	F T-Pattern Check
	8 4500		G Gate
			H Y-Pattern Stop
			I Bellows Seal
			J Cryogenic
			K Tandem Blowdown:
			L 1 Angle Body, 1 Y-Pattern
			M Leak Off
			N Continuous Blowdown
			O T-Pattern Stop
			R Y-Pattern Stop Check
			S Angle Pattern Stop Check
			T T-Pattern Stop Check
			U Throttling
			V Tandem Blowdown:
			W 2 Y-Pattern Bodies
			X Strainer W/Blowoff Valve
			Y Strainer W/Blowoff Fitting
			Z 3-Way
			2 Tandem Blowdown:
			1-Ball Valve
			1-Throttling Valve

OPTIONS

A AUMA Actuator	J I.G.W.	S Single Limitswitch
B EIM Actuator	K Drain Connection	T Ball Check
C Handwheel	L Locking Handle	U Double Limitswitch
D Fisher Actuator	M Stem Shroud	V Valtek Actuator
E Orifice Port	N Copes Actuator	W Needle Disc
F Micrometer Dial	P Limitorque Actuator	X Chain Wheel
G Bendix Actuator	Q L.L.G. W/I.G.W.	Y Conval Actuator
H Spinner Handle	R Rotork Actuator	Z Other

MATERIAL

Carbon	Alloy	Stainless
105 Standard	F22 Standard	316 Standard
A05 Stainless Steel	F91 Standard	B16 Ductile Iron Bushing
Internals	A22 Stainless Steel	D16 316 Body Only
B05 Ductile Iron Bushing	Internals	E16 Monel Trim
C05 17-4 PH Stem	B22 Ductile Iron Bushing	L16 316L Body
E05 Monel Trim	C22 F22 Body /A105 Yoke	N16 Navy Special
N05 Navy Special	E22 Monel Trim	S16 Cobalt Free
S05 Cobalt Free	N22 Navy Special	P16 Polymer Trim
P05 Polymer Trim	S22 Cobalt Free	R16 N60 Bushing
R05 N60 Bushing	P22 Polymer Trim	D73 316L Urea Grade
	R22 N60 Bushing	D81 25-22-2
		D5R Ferralium Trim

Camseal Figure Number System

Nominal Pipe Size — **1.00-8292Z-F227H**

Product Type ————— Size Code
Pressure Class ————— Material
Valve Design ————— Options
End Connection

PRODUCT TYPE	ASME PRESSURE CLASS	VALVE DESIGN	END CONNECTIONS
8 Ball		9 Camseal	1 Threaded
	2 1700		2 Socket Weld Full Port
	3 3100		3 Socket Weld Reduced Port
	4 4500		4 Butt Weld Full Port
			5 Butt Weld Reduced Port
			6 Butt Weld Double Reduced Port
			7 Clamp Connector
			8 Flanged - Standard
			9 Flanged - Special
			0 Other

OPTIONS

A AUMA Actuator	Carbon	Stainless
B EIM Actuator	SA-105	SA-182-F316/F316L
P Limitorque Actuator	Alloy	
R Rotork Actuator	SA-182-F22 Cl.3	
Z Other	SA-182-F91	

ASME Class and Ratings

ASME B16.34 incorporates socket weld end valves and butt weld end valves with Limited Class ratings. Conval offers the industry's finest forged steel globe valve with the highest ratings available. ASME Limited Class Rating applies to 2 1/2" and smaller valves only and allows use of ASME Special Class Tables without NDE.

Standard Class

Standard class is a general use classification which uses the ASME Standard Class pressure temperature tables from B16.34. No NDE or special analysis is required. Standard Class provides the lowest (most conservative) ratings.

- Application: Socket Weld, Butt Weld, Threaded End & Flanged valves (Flanged and Threaded End ratings terminate at 1000°F).
 - NPS 1/2 to 4"
 - No NDE Required
- Valve Marking: B16.34 STD

Limited Class

Limited class is a rating which allows small (NPS 2 1/2" or smaller) socket weld valves to be rated to the higher ASME Special Class pressure-temperature tables as well as Annex G from B16.34.

No NDE is required but special engineering analysis must be completed prior to assigning this rating (This has been completed for all CLAMPSEAL® valves). Limited Class provides ratings which are much higher than Standard Class, and in some cases above 900°F are slightly higher than Special Class ratings.

- Application: Socket Weld and Butt Weld End Valves
 - NPS 1/2 to 2 1/2"
 - No NDE Required
- Valve Marking: B16.34 LTD

Special Class

Special class ratings using the tables from ASME B16.34 can be applied to any forged steel valve.

- Application: Socket Weld, Butt Weld, and Threaded End valves
 - NPS 1/2 to 4"
- NDE Requirements Body and Bonnet:
 - Volumetric Exam: Radiographic or Ultrasonic Testing
 - Surface Exam: Liquid Penetrant or Magnetic Particle
- Valve Marking: B16.34 SPL

Nominal Ratings

The ASME B16.34 tables list nominal ratings, i.e., 1500, 2500, 4500. The actual class number (1500) leads to a table or graph of pressure-temperature rating pairs.

To meet nominal rating requirements, valves must satisfy certain wall and hub thickness requirements which are derived from the maximum stress allowed in a given material. These requirements have been met for all CLAMPSEAL® valves.

CLAMPSEAL® valves which exceed the wall thickness requirements may use the excess wall thickness to increase their service rating. These enhanced ratings are called intermediate ratings. Interpolating between the wall required for a class 1500 and a class 2500 valve allows Conval to intermediate rate its 1500 nominal valves to 2155.

Example: an F22 ASME 2155 LTD valve is rated for 1086 PSIG at 1100°F but only 550 PSIG for 1500 Standard class.

Standard, Limited, or Special Class valves may be rated to either Nominal or Intermediate Ratings.

Ball valves, Gate Valves and Threaded End Valves are nominal ASME B16.34 rated. Consult factory for other ratings.

Note: Flanged valves may not be intermediate rated. Maximum flanged and threaded valve rating is 2500.

Applications

- The modular design of the Clampseal valve family allows for easy customization to provide a wide range of special materials, design options and accessories to match your service requirements.
- Valve configurations are available for many plants and applications including those listed here:
 - Fossil power
 - Nuclear power
 - Refineries
 - Petro chemical plants
 - Chemical plants
 - Gas separation
 - Pulp and paper plants
 - Recovery boilers
 - Marine boilers
 - Cryogenic systems
 - Oil patch steam injection
 - Thin gas service
 - Water treatment
 - Hydraulic systems
- Conval's QA program ensures that every component receives the same control as our ASME III nuclear equipment.
- Each order is reviewed by sales engineers to ensure compatibility with your application.

Ask for our real-life application case studies.


- Main Steam Lines
- Instrumentation
- Vents
- Drains
- Boiler Drums
- Superheaters—Steam Header
- Desuperheaters
- Turbine Generators
- Compressors
- Steam Condensers
- Chemical Fuel Lines
- Economizer
- Gauge Shut-off
- Blow-down (Continuous)
- Reheater – Inlet Header Drain
- Reheater – Outlet Header Drain
- Auxiliary Steam Main
- Water Column Shut-off
- Water Sampling
- Steam Sampling
- Steam Gauge Test
- Test Loop



**Our 900-page
Engineering Binder is
a specifier's dream!
Available at your
fingertips, in print or
online at Conval.com.**

The Conval Story

In 1962, Mr. Chester Siver completed designs for a revolutionary line of high-pressure, forged steel valves. Hamilton Standard (now UTC Aerospace Systems), a division of United Technologies Corporation, was asked to use their then-new Electron Beam Welding technology for joining of parts into valves for subassemblies. Hamilton Standard became intrigued with the valve as an ideal application of the Electron Beam Welding technique, and negotiated a contract for the rights to manufacture and sell the valve. Mr. Siver served as manager of the valve project.

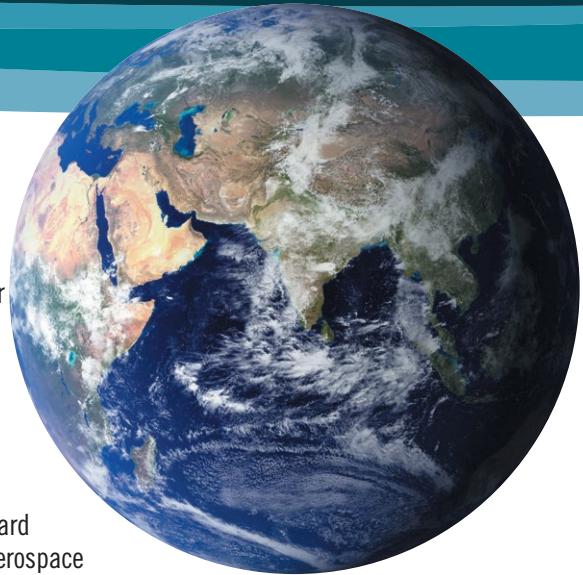

The first CLAMPSEAL® valves were introduced to the market by Hamilton Standard in 1964. However, in the mid-1960's, growing demand for the firm's popular aerospace products forced Hamilton Standard to make the decision to abandon its industrial products.

The rights to the CLAMPSEAL valve reverted back to Mr. Siver. Since CLAMPSEAL valves were born in Connecticut, Mr. Siver founded "Conval" (short for Connecticut Valve) in 1967. Today, the valves are still manufactured in Connecticut, a state with a longstanding reputation for technological innovation and manufacturing excellence.

Conval is a leader in valves for the world's most demanding applications. Our global team of experts can help to meet your most challenging needs. We invite you to contact us today.

**High-pressure, high-temperature ball, bellows seal, check, gate, globe, throttling,
and urea service valves for the world's most demanding applications.**



Thank you for your business!
ISO 9001 certified since 1992
PED certified since 2003
Nuclear N-stamp since 2006

MADE IN

U. S. A

The Conval Inc. logo features the word "Conval" in a bold, blue, sans-serif font. The letter "o" has a horizontal yellow lightning bolt through it. The suffix "Inc." is in a smaller, blue, italicized font. There are two thin yellow horizontal lines above and below the main text.

World Headquarters: 96 Phoenix Avenue, Enfield, CT 06082 USA

Phone (860) 749-0761 Fax (860) 763-3557

e-mail: sales@Conval.com www.Conval.com

Conval's policy is one of continuous development and improvement. Every effort is made to produce up-to-date literature but this catalog should not be regarded as an infallible guide to current specifications and does not form part of any contract. Conval reserves the right to make product improvements and changes without prior notice.